

Commercial & Industrial

Energy Storage Solutions

FOR EU MARKET



Renon Power Technology B.V.

© Renon Power Technology B.V. All Rights Reserved. Specifications are subject to change without notice.
2025-4-10



Renon Power

We Care About Sustainability

With our own R&D team and automatic production factory, we are dedicated to delivering innovative, reliable, and affordable energy storage solutions to global customers.

At Renon, we believe that sustainable energy is the future. We are passionate about reducing carbon emissions and preserving our planet for future generations. That's why we invest heavily in research and development, leveraging the latest technologies to design and manufacture energy storage systems that are efficient, scalable, and adaptable.

Our products are designed to meet the needs of a wide range of applications, from residential and commercial buildings to industrial facilities and utility-scale projects. Whether you're looking to reduce your energy bills, increase your energy independence, or support your sustainability goals, Renon has the right solution for you.

Our commitment to quality and customer satisfaction is unwavering. We work closely with our clients to understand their unique needs and provide customized solutions that meet or exceed their expectations. We also provide comprehensive technical support, maintenance, and warranty services to ensure that our customers get the most out of their investment.

JOIN US ON OUR MISSION TO MAKE RENEWABLE ENERGY WITHIN REACH.

**PROVIDE INNOVATIVE,
RELIABLE, AND
AFFORDABLE ENERGY
STORAGE SOLUTIONS
TO CUSTOMERS
WORLDWIDE.**



Content

—













Meeting the highest standards of quality and safety in the global market.

Industry Application	01
Products	02
Renon EMS	27
Installation Cases	29
Renon Exhibition	30

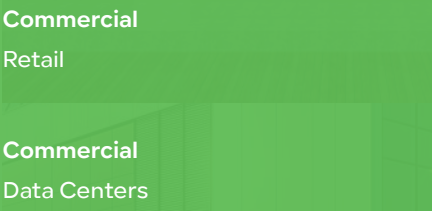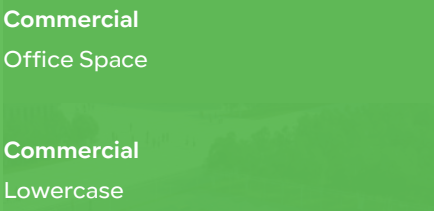

Industry Application

Renon's energy storage products are extensively applied across residential, commercial, and industrial sectors. With exceptional performance, cutting-edge technology, and efficient energy management, they provide reliable, innovative, and eco-friendly energy solutions, helping global users achieve their sustainability goals.

		
Industrial Manufacturing	Commercial Retail	Commercial Office Space
		
Commercial Lowercase	Commercial Data Centers	Commercial Lowercase
		
Industrial Electricity Generating	Commercial Community	Public Safety Sector Lowercase
		

As a company that values renewable energy, we are passionate about developing solutions that contribute to a greener, more sustainable future. Our products are designed to reduce carbon emissions and promote environmental conservation.

Products

Our integrated C&I solutions offer autonomous energy storage and management for commerce and industry.

Battery Storage System



P03
ECube 60AP



P07
MPack 233A

Cabinet Fast DC Charging System



P11
MPack 233C

Distribution Container System



P17
Smart Matrix B

Hybrid Generate



P21
XGen



ECube 60AP

60kWh Air-Cooling Battery

The ultimate commercial and industrial energy storage solution with optimized temperature control, high-rate energy cycling, comprehensive fire and gas safety detection, and advanced integrated power management technologies.



Product Function



Efficient Energy Storage

Stores 60kWh of electricity for future use, ensuring a stable energy reserve. It supports multiple energy inputs, including solar power, diesel generators, and the grid, providing flexible power integration.



Smart Load Balancing

Optimizes energy usage by charging during off-peak hours and discharging during peak demand, helping balance the grid load. By leveraging time-of-use pricing, it effectively reduces electricity costs.



Intelligent Energy Management

Utilizes an advanced Energy Management System (EMS) to optimize charging and discharging strategies. Remote monitoring and management capabilities enhance operational efficiency and system performance.



Reliable Backup Power

Acts as an emergency power source during grid failures, ensuring critical equipment remains operational. With uninterrupted power supply capabilities, it is ideal for data centers, hospitals, and other essential facilities.



Independent Off-Grid Power

Provides a reliable power supply in areas without grid access, making it suitable for homes, businesses, and communities. As a core component of microgrids, it ensures stable and efficient energy distribution.



Scalable & Flexible Design

Features a modular design that supports parallel system integration for expanded capacity. Its flexible configuration allows adjustments in power output and storage capacity to meet diverse energy needs.

Product Features

High Energy Density

Built with high-energy-density 1P16S 100Ah batteries, this system features a compact design, making it ideal for space-constrained environments. Its lightweight structure enhances ease of installation and transportation.

Extended Lifespan

Designed for longevity, it supports over 8000 charge-discharge cycles with minimal degradation, ensuring stable long-term performance.

High-Efficiency Power Conversion

With superior charge and discharge efficiency and a charge/discharge current of 95A, it minimizes energy loss while delivering millisecond-level response times to meet urgent power demands.


Enhanced Safety & Reliability

Equipped with multiple protection mechanisms, including safeguards against overcharging, over-discharging, overheating, and short circuits. With an IP55 protection rating, fire-resistant materials, and a flame-retardant design, it further enhances operational safety.


Application Scenario




Product Topology

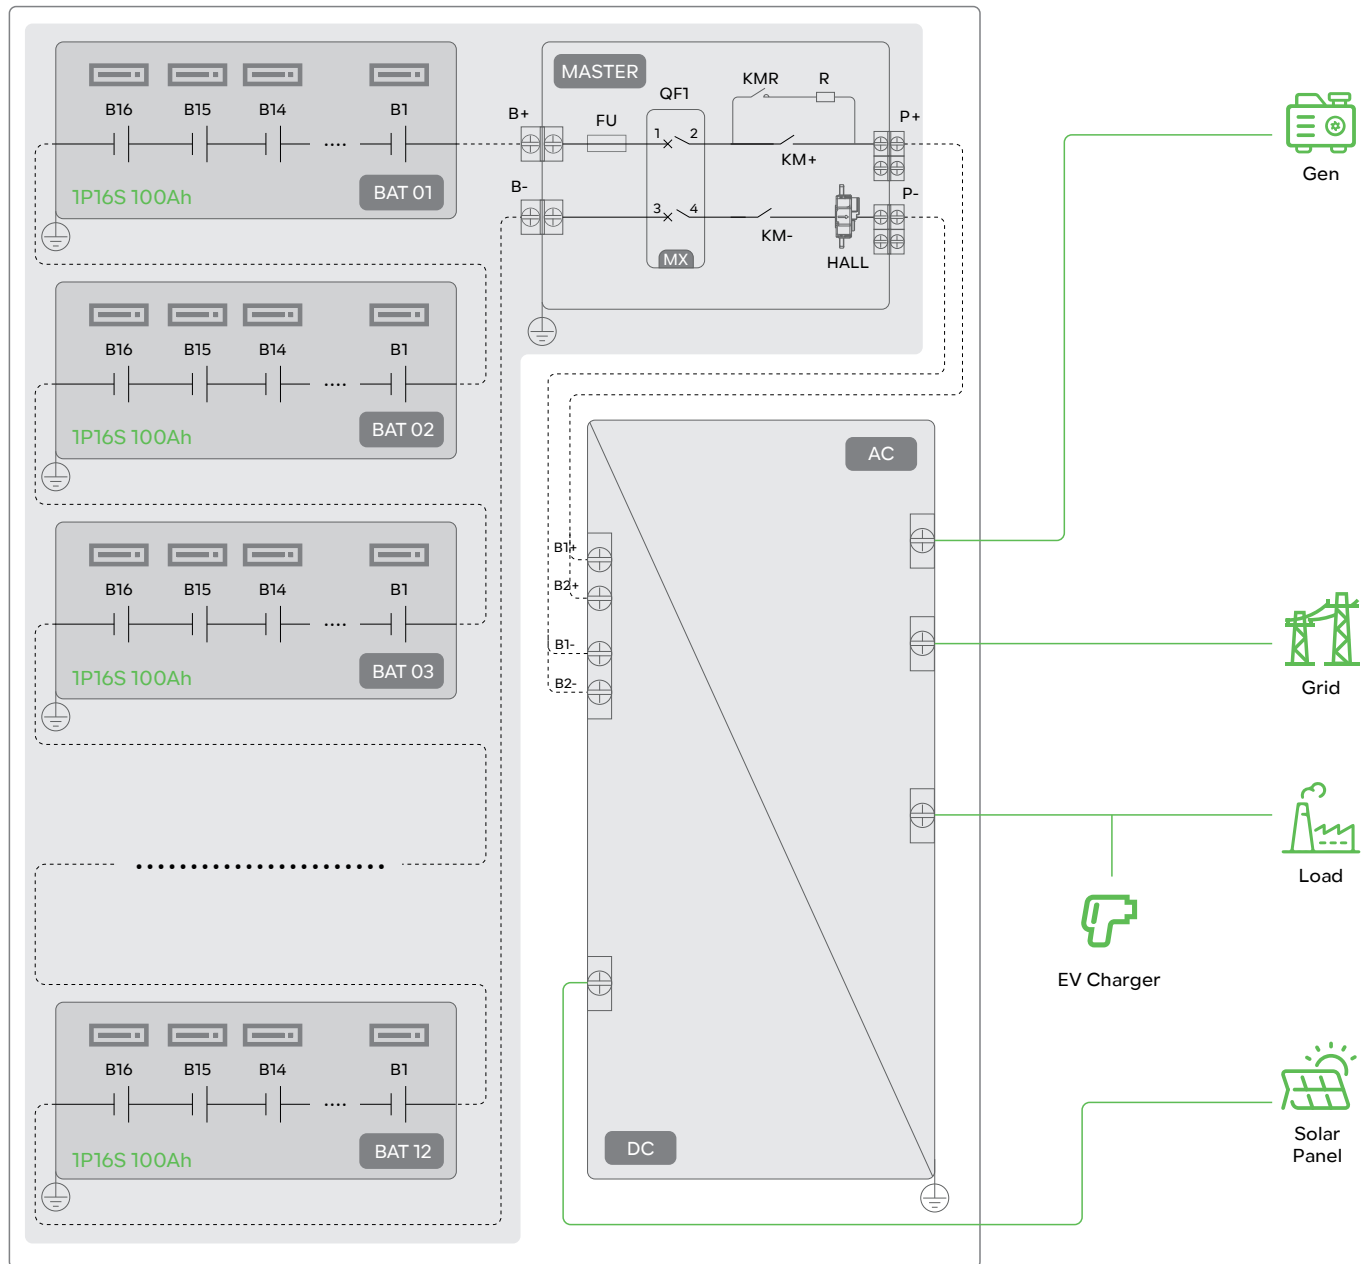


Packaging & Shipping Details

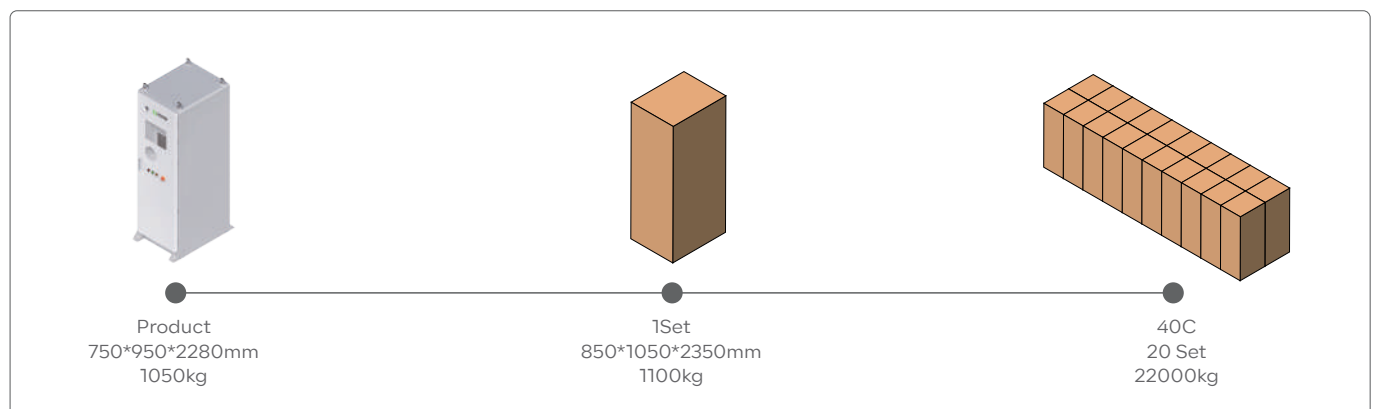

Single / Max. Parallel System Layout

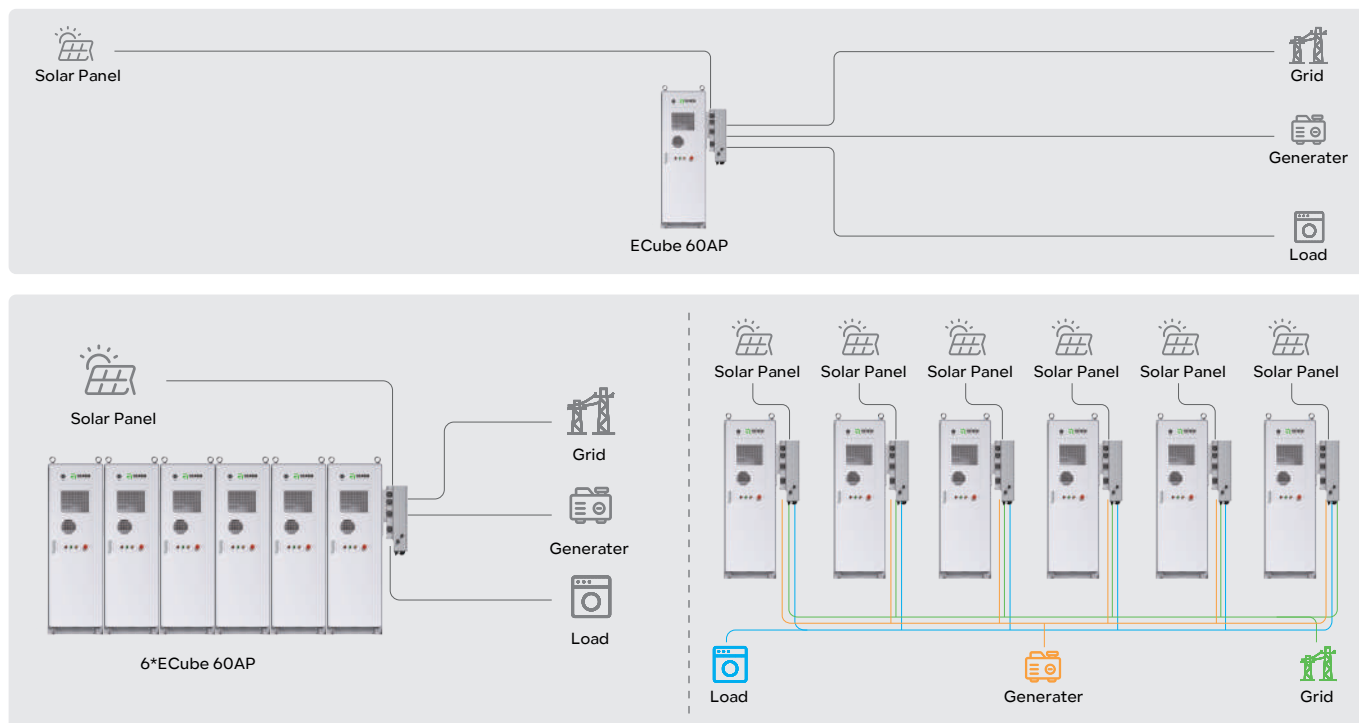

Energy Management System(EMS) Structure

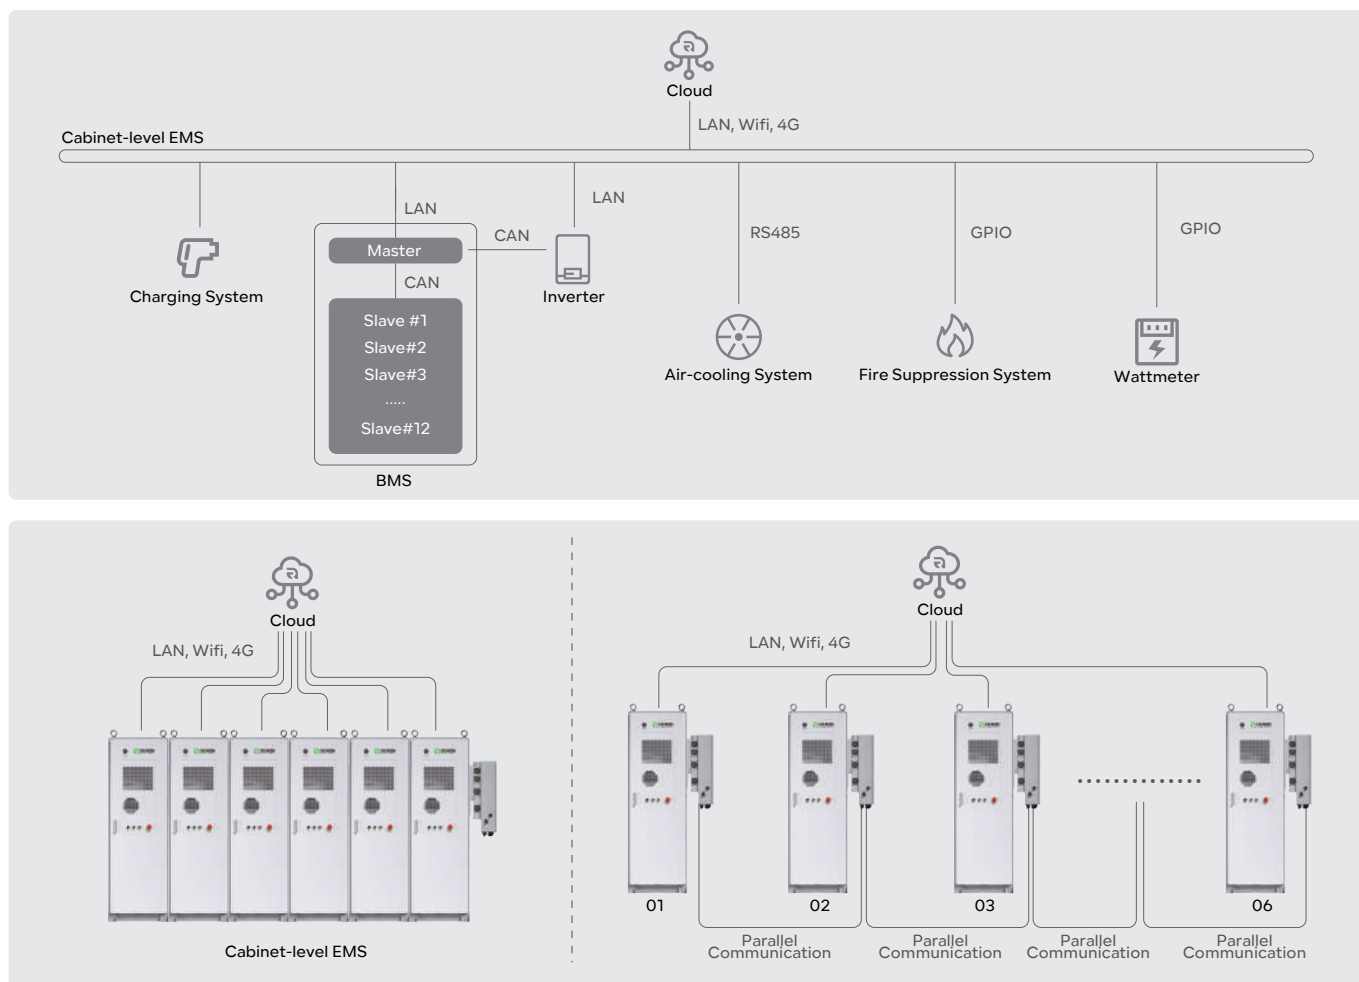

Product Parameter

Battery Energy Storage	
Cell Chemistry	LiFePO4
Module Energy (kWh)	5.12
Module Nominal Voltage (V)	51.2
Module Capacity (Ah)	100
Battery Module Combination	12S1P
System Nominal Voltage (V)	614.4
System Operating Voltage (V)	562.5~681.6
System Energy (kWh)	61.44
Charge/discharge Current (A)	95

PV Input	
Max. Input Power (kW)	96
Max. Input Voltage (V)	1000
Start-up Voltage (V)	180
Rated Voltage (V)	600
MPPT Voltage Range (V)	150~850
Number of MPP Trackers	4
Number of String per MPPT	8
Max. Current per MPPT (A)	40
Max. Short Circuit Current per MPPT (A)	60

Charging System(Optional)	
Charging Type	Charging Mode 3 Case B & Case C
Outlet Options	AC Type 2 (IEC 62196-2)
Input/Output Current Rating (A)	32, three phase
Input/Output Power Rating (kW)	23@415Vac
Input/Output Voltage (Vac)	380~415
Input Frequency (Hz)	50/60
Cable Length	5.0 m, Optional: 7.5 m
Distribution Systems	TT, TN system
Connector Type	3P + N + PE
Certifications	IEC/EN 61851-1, IEC 61851-21-2 IEC 62196-1, IEC 62196-2, IEC62109

AC Output(On-Grid)	
Rated Output Power (kW)	50
Max. Output Power (kVA)	50
Rated Output Current (A)	76
Max. Input Power from Grid (kW)	50
Max. Input Current from Grid (A)	76
Rated Grid Voltage	3 / N / PE, 230 V / 400 Vac
Rated Grid Frequency (Hz)	50 / 60
Max. AC Passthrough Current (A)	152
THDi (@Rated Power)	<3%
Power Factor	0.8 leading ~ 0.8 lagging

AC Output(Back Up)	
Rated Output Power (kW)	50
Max. Apparent Output Power	1.6 times / 2s
Rated Output Current (A)	76
Switch Time	<10ms
Rated Voltage	3 / N / PE, 230V / 400Vac
Rated Frequency (Hz)	50/60
THDv (@linear load)	<2%

General Parameters	
Battery Model	R-060050A1-EU
Dimension - W*D*H (mm/in)	750*950*2280/29.5*37.4*89.7
Weight (kg/lb)	~1050/~2314.8
Working Temperature (°C/°F)	-30~50/-22~122
Communication Interface	CAN, RS485, Wi-Fi, LTE
Humidity(RH)	5%~85%, non-condensation
Altitude	≤4000m/13122ft(2000m/6561ft derating)
IP Rating	IP55
Storage Temperature (°C/°F)	-20~35/-4~95
Recommend Depth of Discharge	90%
Cycle Life	>8000 cycles
Warranty	3 years free, paid from the 4th to the 15th year
Certification	IEC/EN62619:2022, IEC/EN62477-1:2012+A11+A1+A12 IEC/EN61000-4-2:2019, IEC/EN61000-4-2:2019 EN301908-1 V15.2.1:2013, EN301908-13 V13.2.1:2022 EN301489-1:2019 V2.2.3:2019, EN301489-52 V1.2.1:2021

MPack 233A

233kWh Liquid-Cooling Battery

MPack 233A is a high-performance energy storage solution for commercial and industrial use, featuring optimized thermal management, efficient energy cycling, advanced fire and gas detection, and intelligent power management for reliable and scalable energy integration.



Product Function



Advanced Energy Storage

Stores 233 kWh of electricity for future use, ensuring a reliable energy reserve. It supports integration with multiple power sources, including solar energy, diesel generators, and the grid, offering versatility in energy input.



Smart Load Management

Balances grid demand by charging during off-peak hours and discharging during peak hours, optimizing energy distribution. By leveraging time-of-use pricing, it helps reduce electricity costs and enhance overall energy efficiency.



Intelligent Energy Management

Optimizes charging and discharging efficiency through an advanced Energy Management System (EMS). With remote monitoring and real-time control capabilities, it enhances operational oversight and improves energy utilization.



Reliable Backup Power

Provides a dependable backup power supply during grid failures, keeping critical equipment operational. With seamless, uninterrupted power delivery, it is ideal for mission-critical applications such as data centers and hospitals.



Independent Off-Grid Power

Delivers a stable power supply to homes, businesses, or communities in off-grid areas, enabling independent operation. As a key component of microgrid systems, it ensures efficient and reliable energy distribution.



Scalable & Flexible Design

Features a modular design that supports parallel system integration for seamless capacity expansion. Its customizable configuration allows adjustments in power output and storage capacity to meet specific energy demands.

Product Features

High Energy Density

Designed with high-energy-density 1P52S 280Ah batteries, this system offers a compact size, making it ideal for space-constrained environments. Its optimized structure reduces weight, enhancing ease of installation and transportation.

Long Lifespan

Designed for longevity, it supports over 8000 charge-discharge cycles with minimal degradation, ensuring stable long-term performance.


High-Efficiency Conversion

With superior charge and discharge efficiency and a charge/discharge current of 180A, it minimizes energy loss while delivering millisecond-level response times to meet urgent power demands.


Safe & Reliable

Equipped with multiple protection mechanisms, including safeguards against overcharging, over-discharging, overheating, and short circuits. With an IP54 protection rating, fire-resistant materials, and a flame-retardant design, it further enhances operational safety.


Application Scenario

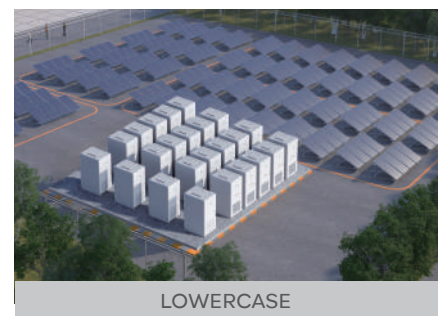



Product Topology

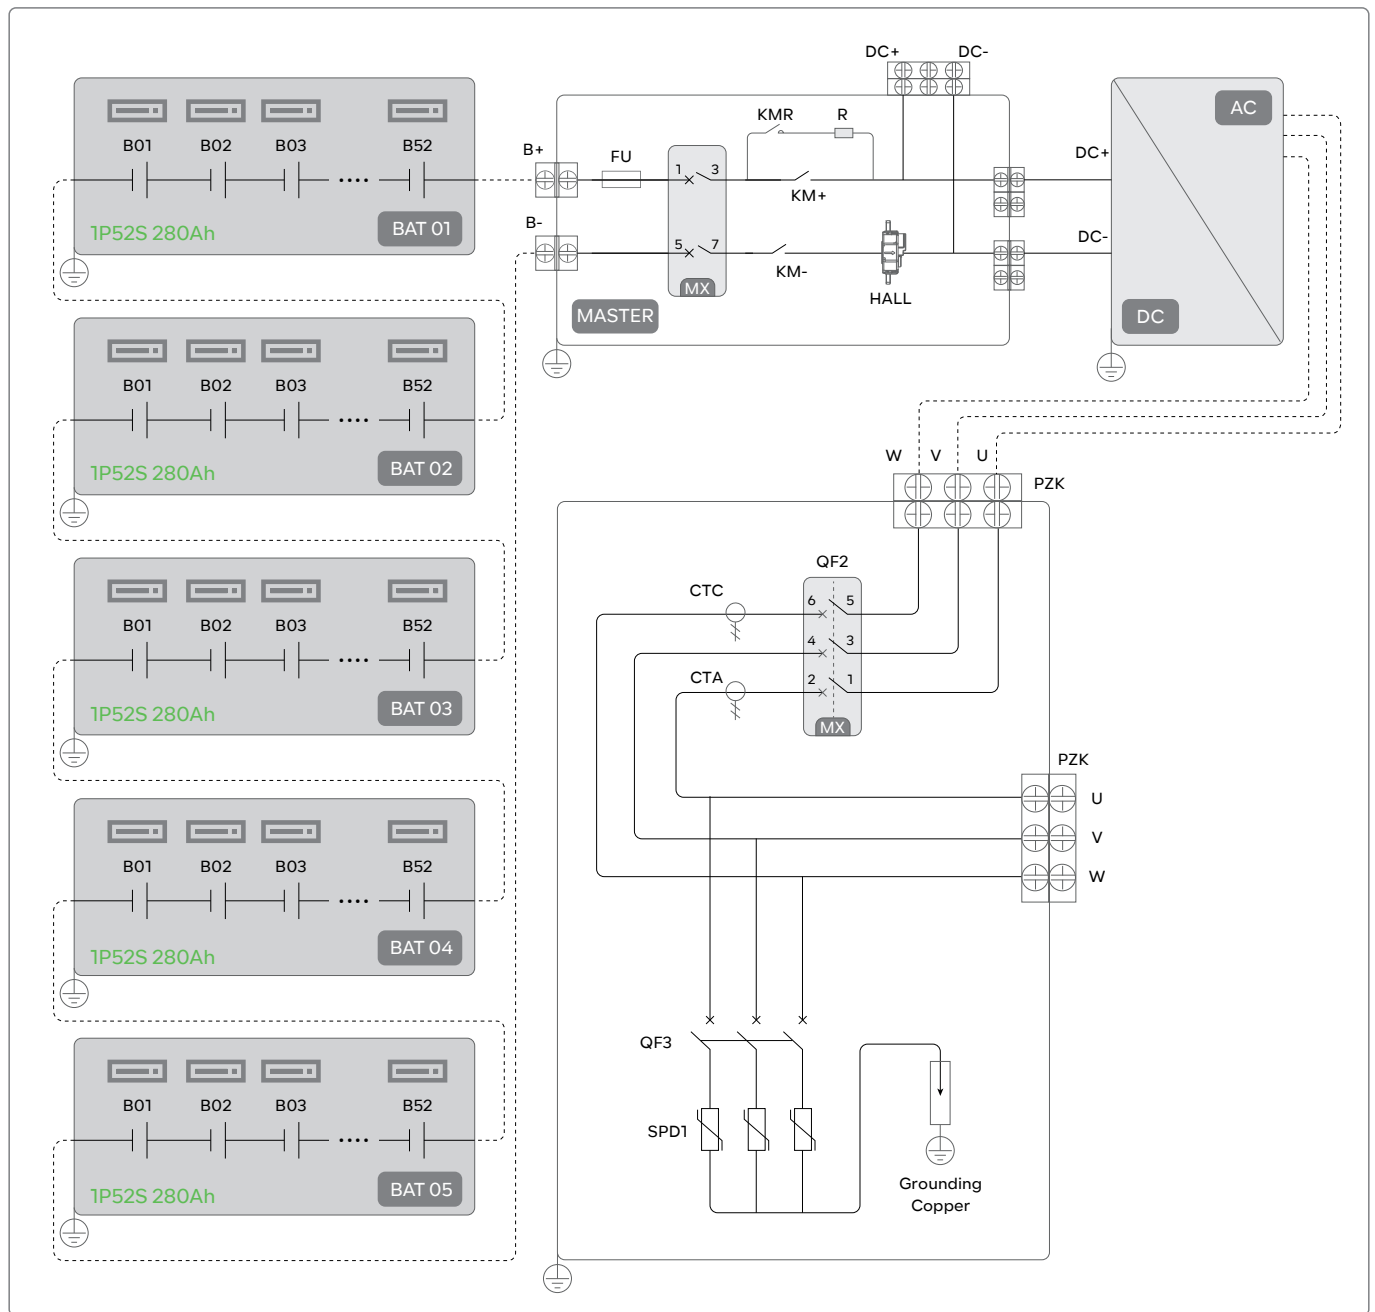



Packaging & Shipping Details

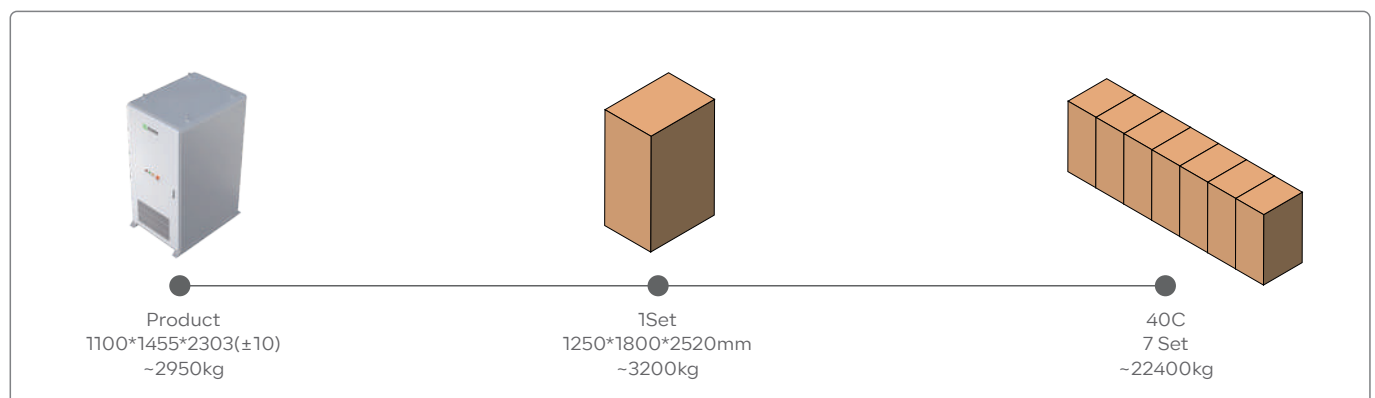

Single / Max. Parallel System Layout

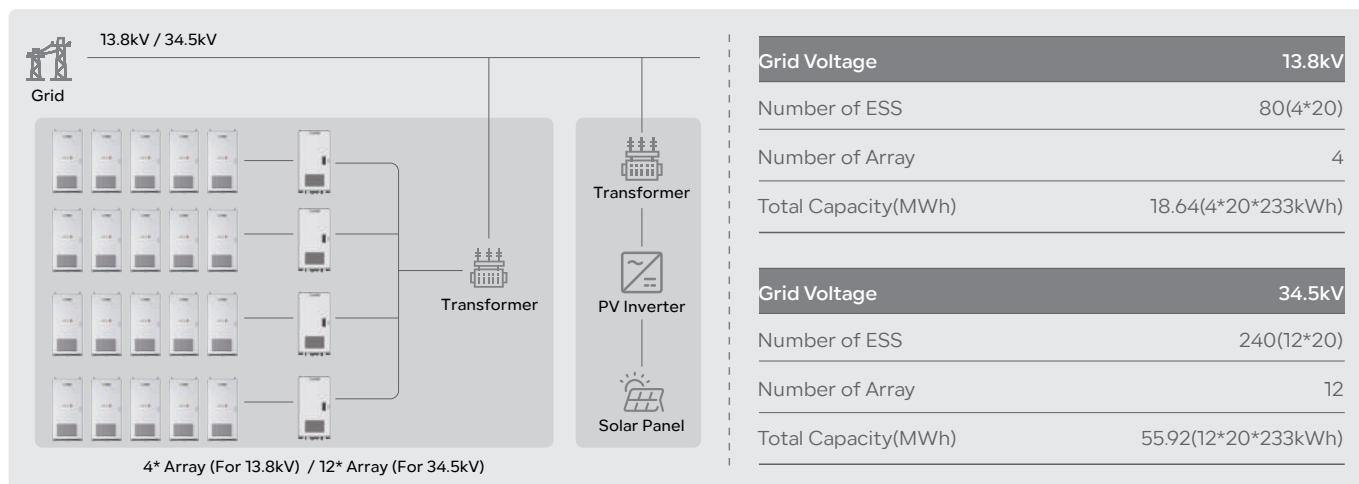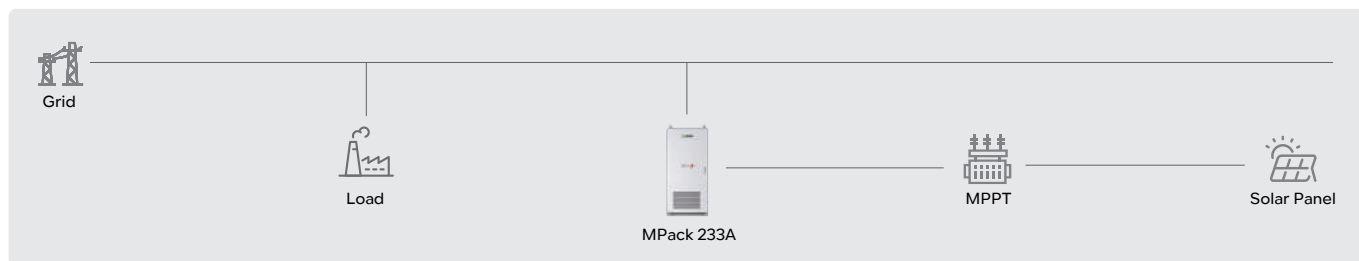

Energy Management System(EMS) Structure

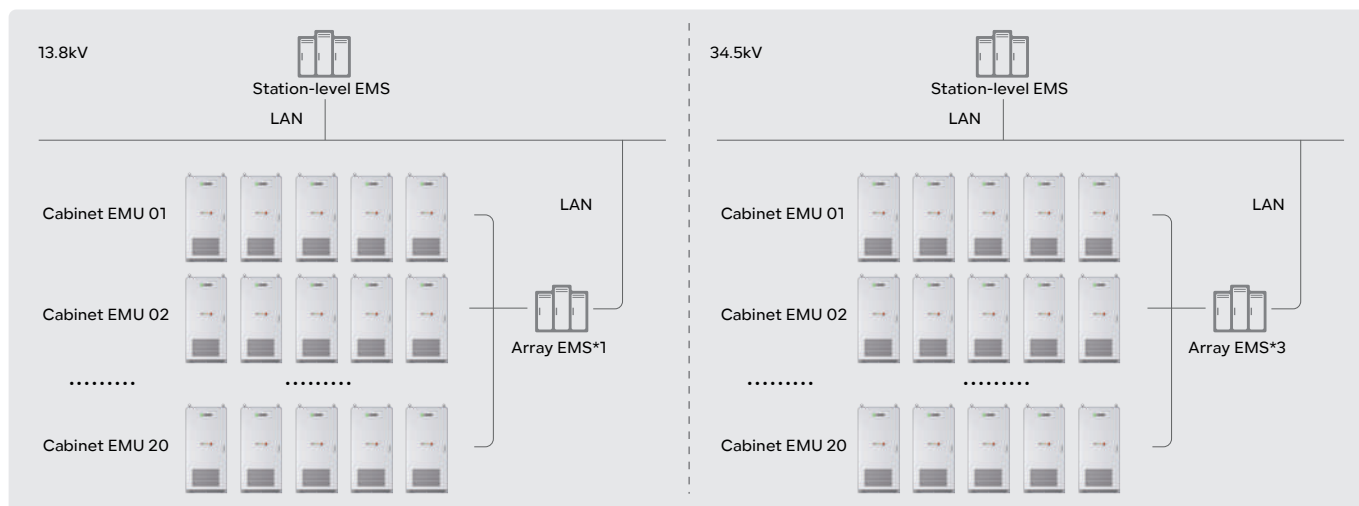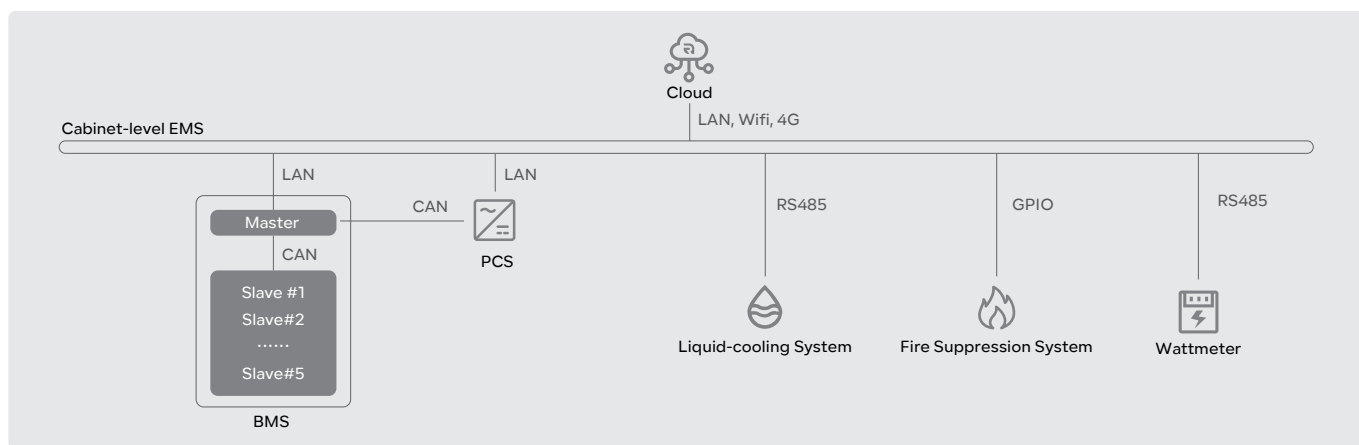

Product Parameter

Battery Energy Storage

Cell Type	LFP 3.2V / 280Ah
Module Combination	1P52S
System Combination (Modules)	5 in series
Capacity (kWh)	233
Nominal Voltage (V)	832
Operation Voltage Range (Vdc)	761~923
Discharge Depth	90% DoD
Thermal Management Mode	liquid-cooling
Thermal Control Management	Aerosol Extinguishing

AC Output

Rated AC Output Power (kW)	125
Max. AC Output Power (kVA)	150
Rated Output Voltage (Vac)	400
Output Voltage Range (Vac)	340~440(Settable)
Rated Grid Frequency (Hz)	50/60
Max. Output Current (A)	182
Adjustable Power Factor	>0.99
THDi	<3%

DC Input/Output

Max. Power (kW)	250
Voltage Range (V)	761~923
Max. Current (A)	320

System Characteristic

Communication Interface	CAN, RS485, Wi-Fi, LTE
Warranty	3 years free, paid from the 4th to the 15th year
Certifications	IEC/EN62619:2022, IEC/EN62477-1:2012+A11+A1+A12 IEC/EN61000-6-2:2019, IEC/EN61000-6-4:2019, EN 50549-1:2019, EN 50549-10:2022

General Parameters

Battery Model	R-MP233125A0-EU
Dimensions - W*D*H (mm/in)	1100*1455*2303(±10)/43*57.3*93.4
Total Weight (kg/lb)	2630(±10%)/5798(±10%)
Operation Altitude	≤4000m/13122ft(2000m/6561ft derating)
Noise Level @1m	<75 dB(A)
IP Rating	IP54
Operating Temperature(°C/°F)	-20~55/-4~131
Operating Humidity (RH)	0 to 95%, non-condensation
Storage Conditions	-20~30°C/-4~86°F, Up to 95% RH, non-condensation, State of Energy (SoE): 50% initial

MPack 233C

Cabinet Fast Charging Solution

MPack 233C is a high-performance energy storage solution for commercial and industrial use, featuring optimized thermal management, efficient energy cycling, advanced fire and gas detection, and intelligent power management for reliable and scalable energy integration.



Product Function



Stable & Reliable Performance

Featuring a 233kWh energy storage system, it delivers consistent power even during grid instability. An advanced thermal management system ensures efficient heat dissipation, enabling long-term stable operation.



Energy-Efficient & Eco-Friendly

With high-efficiency power conversion, it minimizes energy loss and reduces operational costs. It is also compatible with renewable energy sources such as solar and wind, helping lower carbon emissions and promote sustainability.



Space-Saving Design

The dual-gun charger adopts a compact design that conserves installation space, making it ideal for various application scenarios including urban and commercial environments.



Intelligent Management System

Supports remote operation and real-time monitoring for easier maintenance and control. It also logs detailed charging data, helping operators optimize energy usage and refine charging strategies.



Enhanced User Experience

Designed with user convenience in mind, it features an intuitive interface and supports multiple payment methods. Built-in protections like over-voltage and over-current safeguards ensure a safe and reliable charging experience.



Cost-Effective Operation

Its high charging efficiency reduces power loss, improving overall energy utilization. Intelligent system control and optimized cooling also extend equipment lifespan, further reducing long-term operational costs.

Product Features

High-Power Fast Charging

Delivers up to 320kW for ultra-fast EV charging and supports dual-vehicle charging to improve efficiency and reduce wait times.

Comprehensive Safety Protection

Equipped with over-voltage, over-current, over-temperature, and short-circuit protection, plus insulation monitoring and emergency stop for maximum safety, and an IP54 protection rating for added durability in challenging environments.

Integrated Energy Storage & Off-Grid Power

Features a 233kWh battery system that provides backup power during grid outages or peak hours, ensuring continuous charging even when off-grid.


Smart Data Tracking & Energy Analysis

Automatically records detailed charging data, including energy usage, duration, and cost, for both users and operators. It also offers energy consumption reports to help optimize the operation and efficiency of the charging station.


Application Scenario




Product Topology(DC coupling)

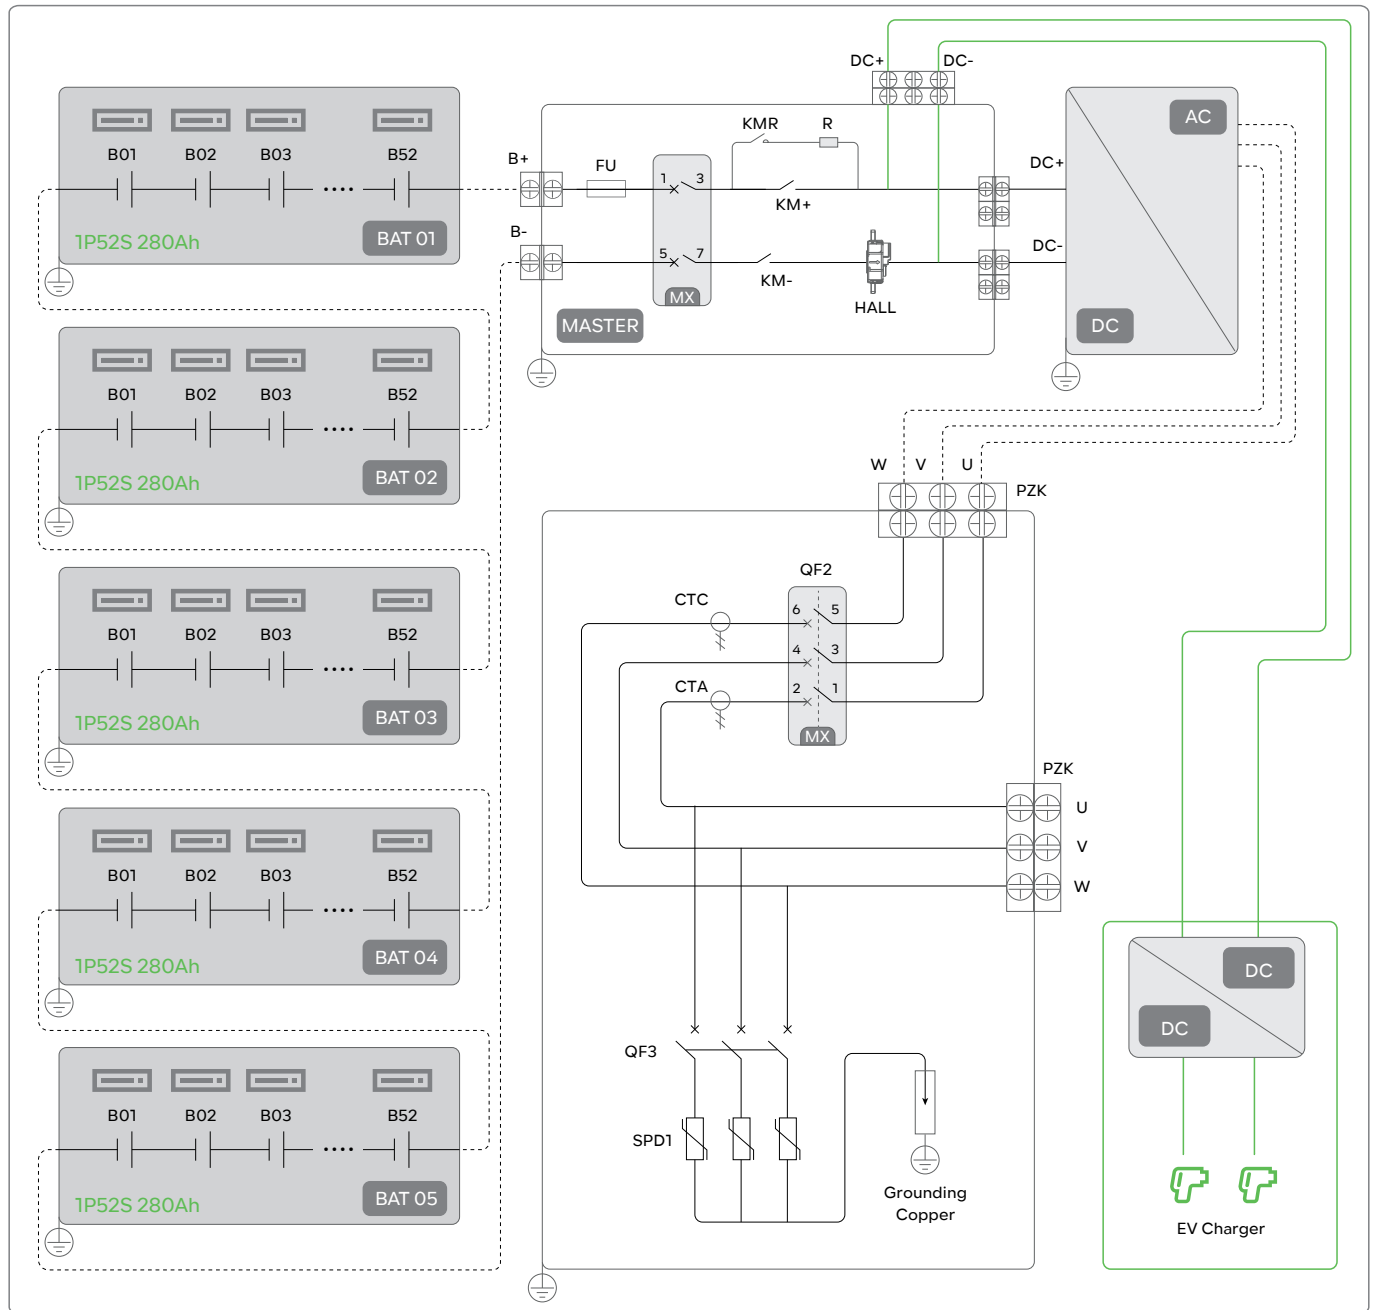


BESS Packaging & Shipping Details

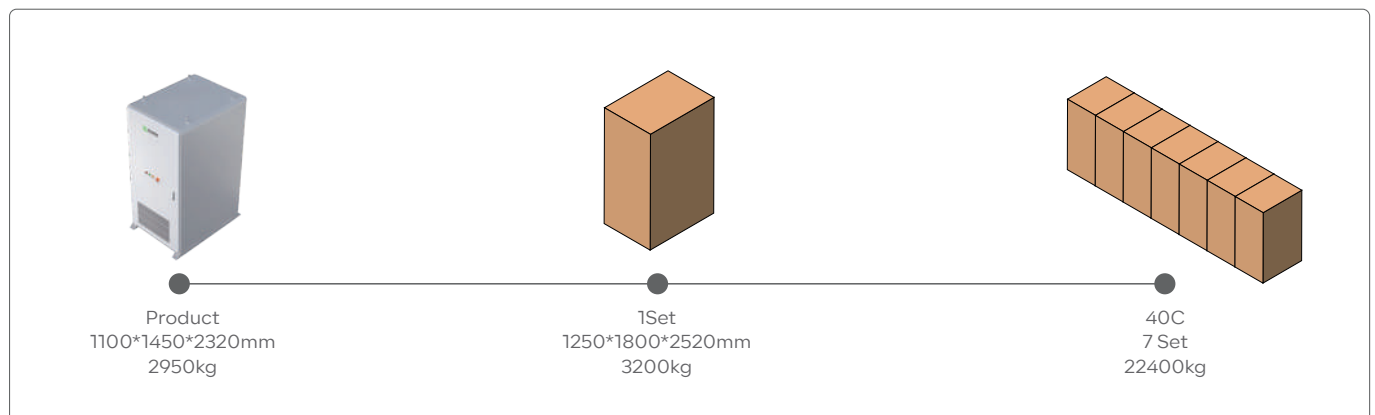


Product Topology(AC coupling)

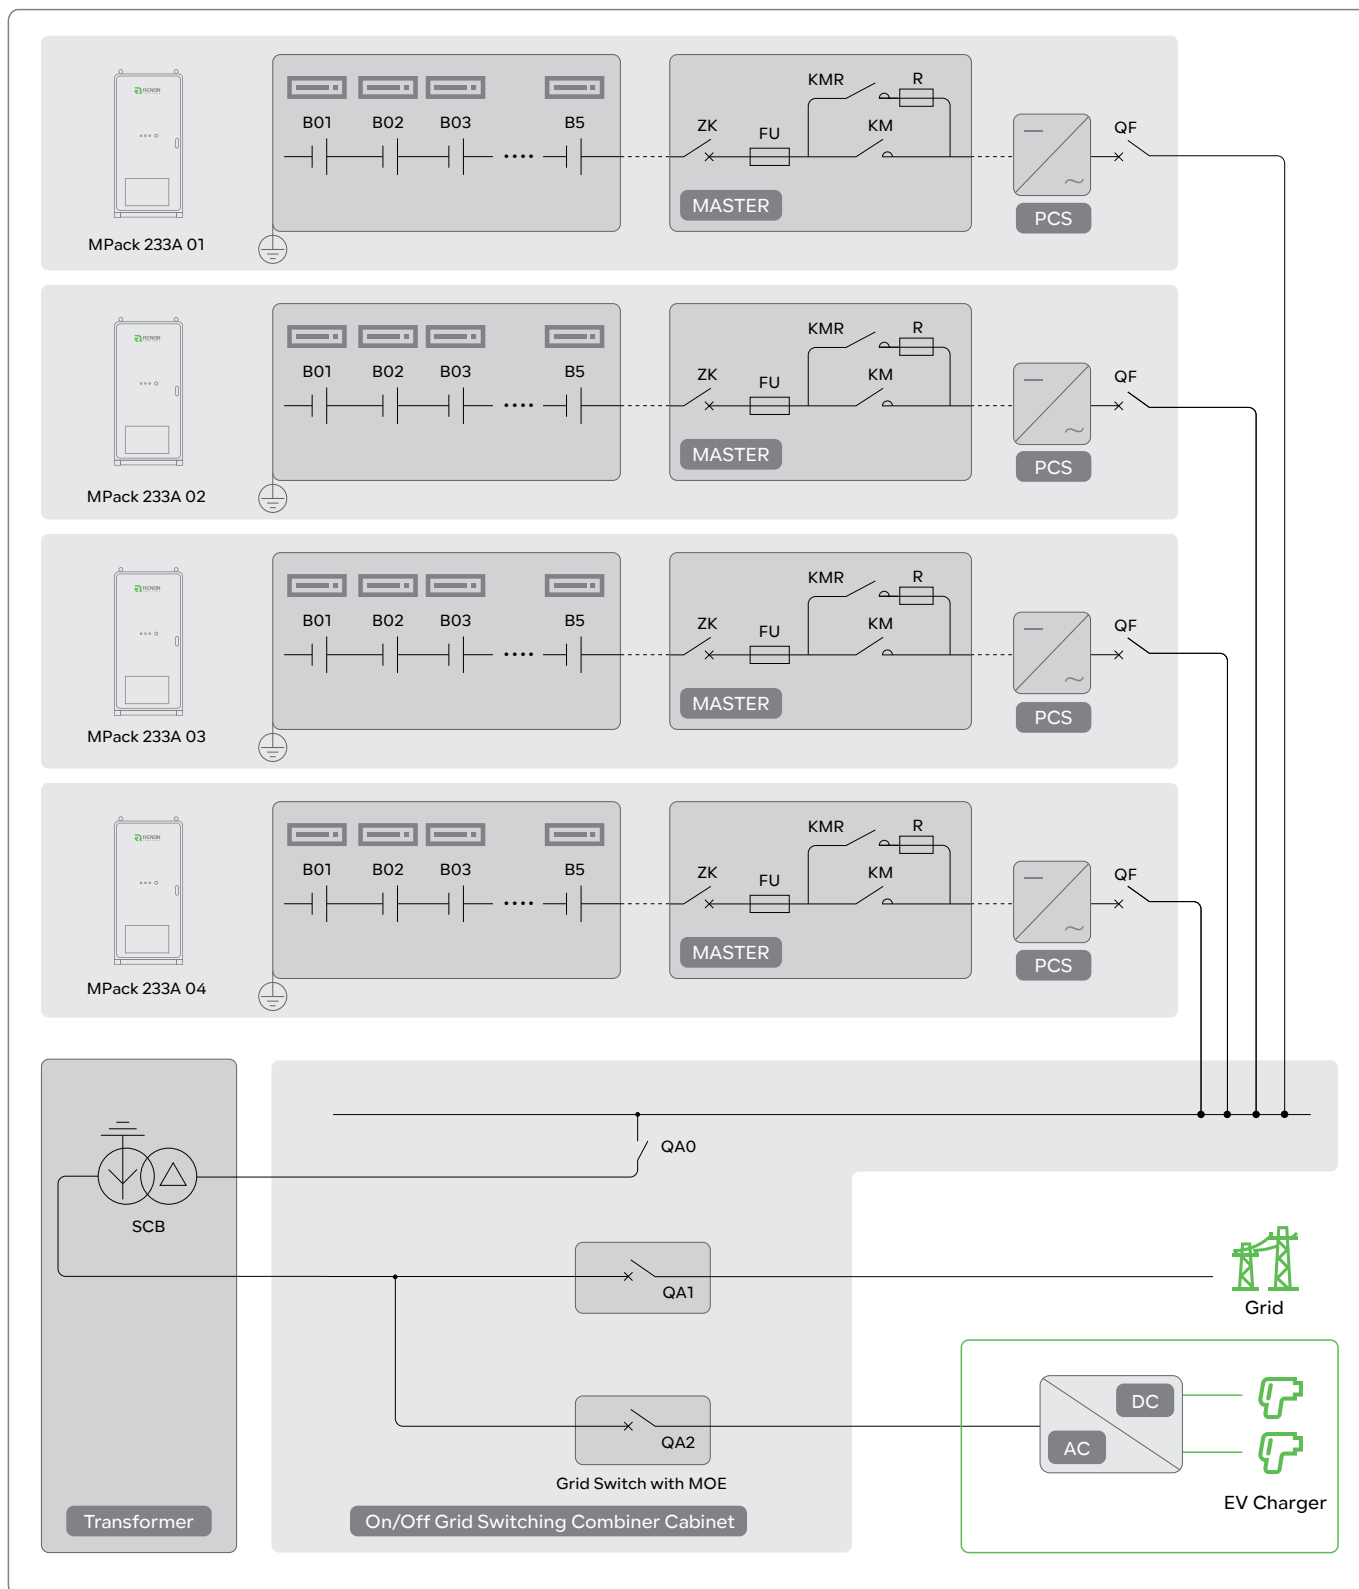

Single / Max. Parallel System Layout

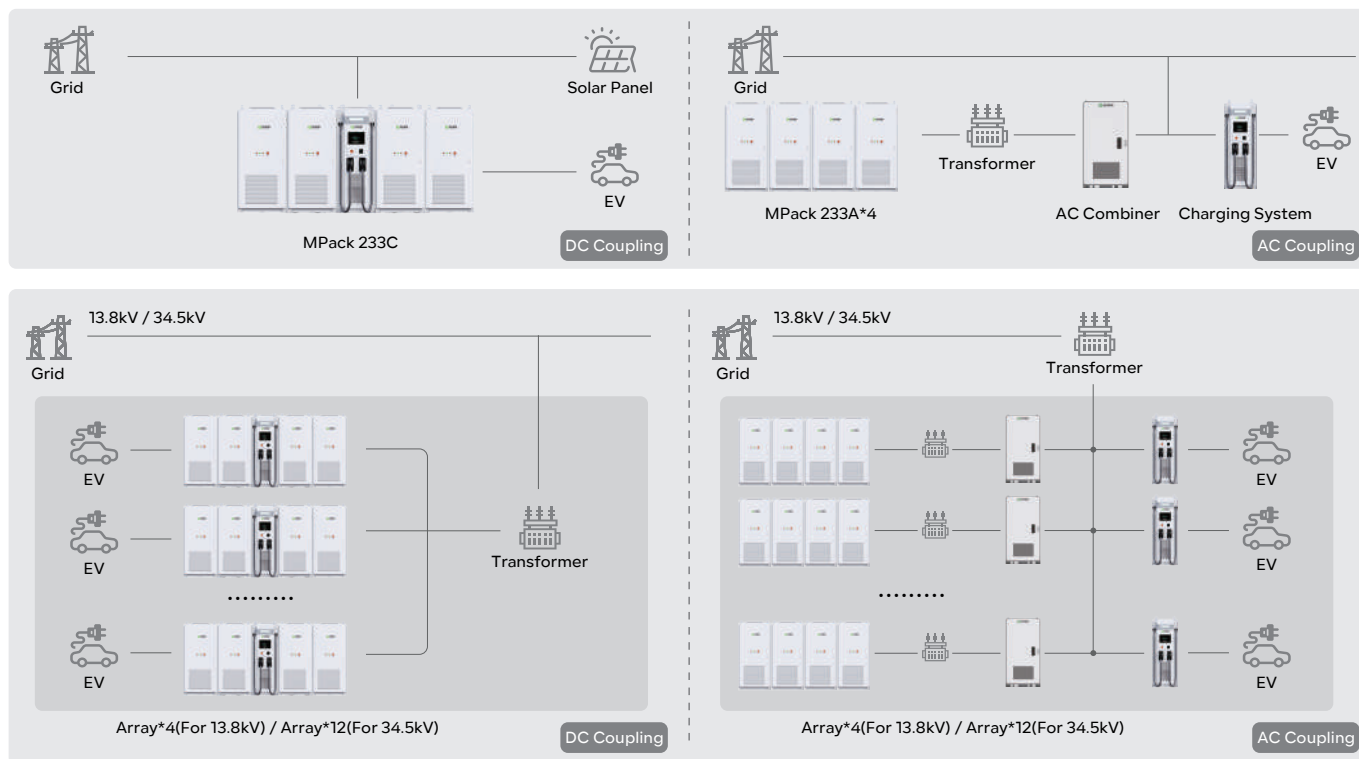

Energy Management System(EMS) Structure

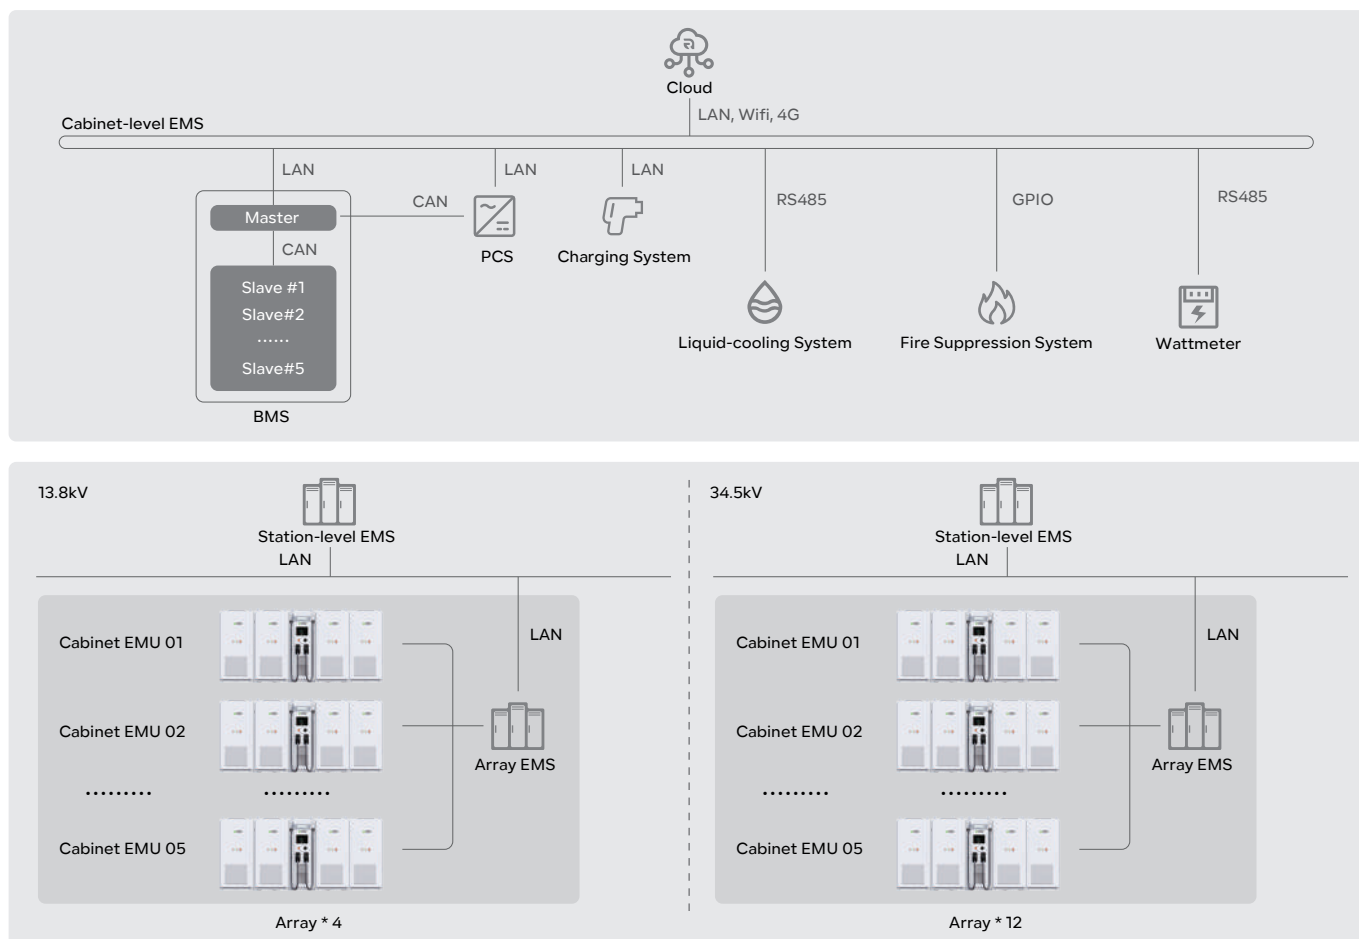

BESS Parameter

Battery Energy Storage	MPack 233C	MPack 466C	MPack 699C	MPack 932C
Battery Capacity (kWh)	233	466	699	932
Battery Charge/Discharge Rate	≤0.5C			
Battery Efficiency	≤95%			
Battery Module IP Rating	IP54			
Battery Cooling System	Liquid-cooling			
Thermal Control Management	Aerosol Extinguishing			
AC Output				
Rated AC Output Power (kW)	125	250	375	500
Max. AC Output Power (kVA)	150	300	405	540
Rated Output Voltage (Vac)	400			
Output Voltage Range (Vac)	340~440(Settable)			
Rated Grid Frequency (Hz)	50/60			
Max. Output Current (A)	182	364	491.4	655.2
Adjustable Power Factor	> 0.99			
THDi	<3%			
DC/DC				
Max. Charge/discharge Power (kW)	250	500	750	1000
Charge/discharge Voltage Range (Vdc)	761~923			
Max. Current (A)	320	576	864	1152
* The charging power of the DC interface is related to the load power, battery SOC and temperature.The discharge power of the DC interface is related to the battery's state of charge				
System Characteristic				
Communication Interface	CAN, RS485, Wi-Fi, LTE			
Warranty	3 years free, paid from the 4th to the 15th year			
Certifications	ANSI/CAN/UL 1973:2022, ANSI/CAN/UL 9540:2020, UL 9540A:2019, UL 1741:2012 Ed.3+ R:19May2023, UL 1741:2021 Ed.3(Supplement SB), CSA C22.2#1071:2016 Ed.4+U1, IEEE 1547:2018 IEEE 1547.1:2020, FCC Part 15 Subpart B:2013			
General Parameters				
Battery Model	R-MP233125C1-EU	R-MP466250C1-EU	R-MP699375C1-EU	R-MP932500C1-EU
Dimensions - W*D*H (mm/in)	~2200*1450*2320 ~86*57*91.3	~3300*1450*2320 ~129*57*91.3	~4400*1450*2320 ~172*57*91.3	~5500*1450*2320 ~215*57*91.3
Total Weight (kg/lb)	3685(±5)/8124(±11)	6545(±5)/14429(±11)	9405(±5)/20734(±11)	12265(±5)/27039(±11)
Operation Altitude	≤2000m / 6561ft			
Noise Level @1m	<80 dB(A)			
IP Rating	IP54			
Operating Temperature (°C/°F)	-20~55/-4~131*			
Operating Humidity (RH)	0 to 95%, non-condensation			
Storage Conditions	-20~30°C/-4~86°F, Up to 95% RH, non-condensation, State of Energy (SoE): 50% initial			

* We can offer a wider range of temperatures if required, please speak to one of our sales colleagues.

■ Charging System Parameter

Power Input	
Input Voltage(V)	832(600~1500)
Rated Current(A)	495
Power Output	
DC Voltage(Vdc)	200~1000
Max. Current(A)	400
Max. Power(kW)	400
Efficiency	>97%
Voltage Stabilized Accuracy	≤0.5%
Current Stabilized Accuracy	≤1%
Current Sharing Unbalance	≤3%
Peak-peak Ripple	≤1%
Sturcture Design	
Installation Method	Floor-stand
Charging Outlet	DC CCS1
Cable Length	5.0m
Authentication	RFD, On-screen PIN code authorization Option: payment terminal Autocharge Other Customization
Communication	
Charger v.s. EV	PLC(DIN 70121:2014-12/ISO15118)
Communication Protocol	OCPP 1.6J
Safety Protection	
Over/under Voltage Protection	Yes
Over Current Protection	Yes
Overload Protection	Yes
Short Circuit Protection	Yes
Leakage Protection	Yes
Over Temperature Protection	Yes
Grounding Protection	Yes
Integrated Surge Protection	Yes
General Parameters	
Battery Model	R-SP400C01-EU
Dimensions - W*D*H (mm/in)	~1100*900*2320/43*35.4*91.3
Total Weight (kg/lb)	~825/1818.8
Operating Temperature (°C/°F)	-30~50/-22~122
Humidity (RH)	5%~95%, non-condensation
Operation Altitude	≤2000m/6561ft
IP Rating	IP55
IK Rating	IK10(HMI: IK08)
Application Site	Indoor/Outdoor
Cooling Method	Air-cooling
Noise	<65dB(Ambient Temperature)

Smart Matrix B

10ft Battery & Boost Converter One Stop Solution



Product Function



BMS Battery Management System

The BMS ensures safe and efficient operation of the battery by monitoring key parameters such as voltage, temperature, and charge/discharge status. It helps to extend battery life, improve performance, and prevent issues like overcharging or overheating.



EMS Energy Management System

The EMS optimizes energy flow within the system, dynamically adjusting charging and discharging strategies based on demand and grid conditions. It enhances efficiency, reduces energy costs, and integrates with grid systems for stable power management.



UPS Uninterruptible Power Supply

The UPS function ensures continuous power during grid failures or disruptions, maintaining stable operation of critical equipment like data centers or communication stations, thus enhancing system reliability.



Compatible with Mainstream PCS

The 1500V DC battery system offers high energy density, low losses, and cost-efficiency. It is compatible with most PCS on the market, making it adaptable to various renewable energy and grid applications.



Multi-Unit Parallel Operation

Smart Matrix D supports multi-unit parallel operation, enabling scalable capacity expansion. This feature ensures flexibility and reliability, making it suitable for both small and large-scale projects.



Fire Protection

Equipped with advanced fire protection features, including temperature control and fire detection systems, Smart Matrix D ensures safety by automatically activating emergency measures in case of abnormal conditions, minimizing fire risks.

Product Features

High Integration

The liquid cooling system battery box offers the highest capacity with the latest dimensions(10ft), requiring minimal space while providing flexible transportation and installation options.

Efficient and Flexible

Featuring a modular structure and an efficient liquid cooling system, it is designed to perform well in extreme environments, maximizing battery lifespan and performance.

Safety and Reliability

Equipped with comprehensive battery monitoring, multi-layer fire prevention, top ventilation design, and active AI management to ensure maximum safety and reliability, along with an IP54 protection rating for enhanced durability in various environments.

Smart Operation and Maintenance

Comes with a complete EMS that is easy to upgrade, featuring big data management checks, proactive handling, and intelligent SOC calibration to ensure optimal performance with zero downtime.

Application Scenario



LOWERCASE




ELECTRICITY GENERATING




COMMUNITY


Product Topology

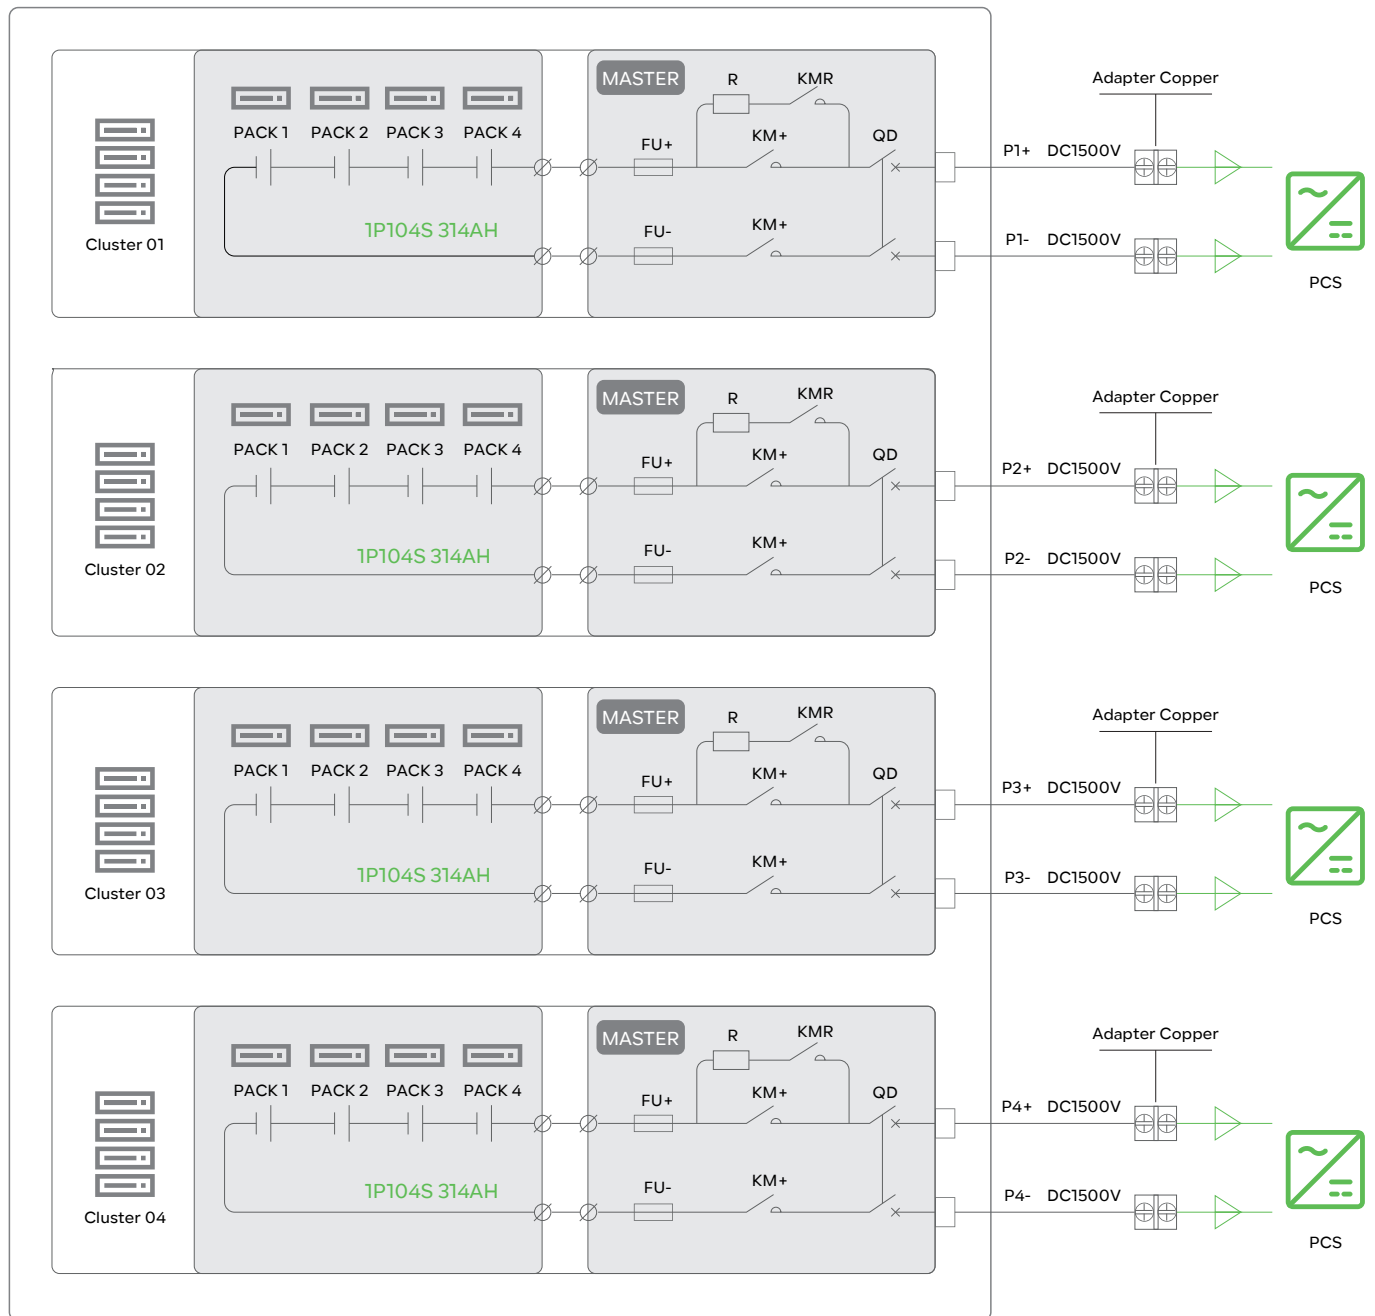


Packaging & Shipping Details

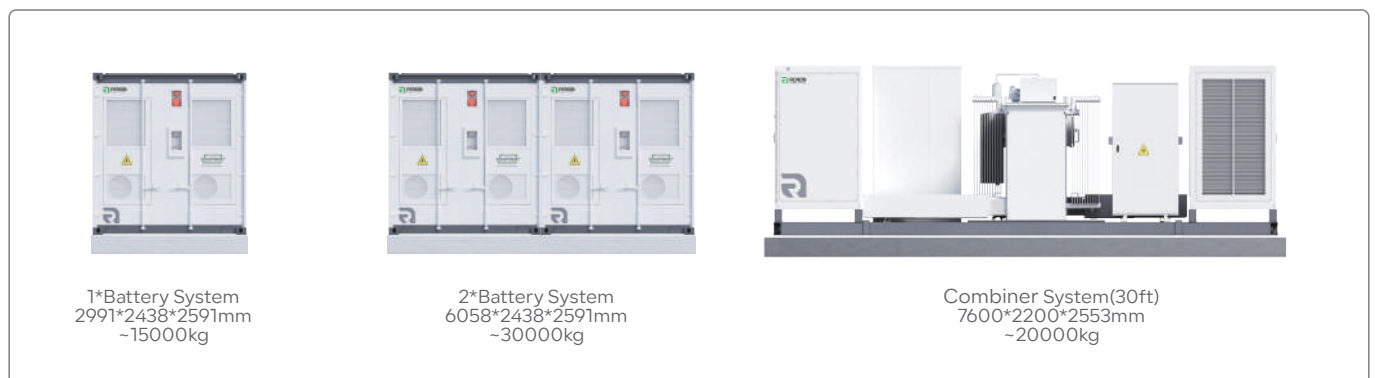

Single / Max. Parallel System Layout

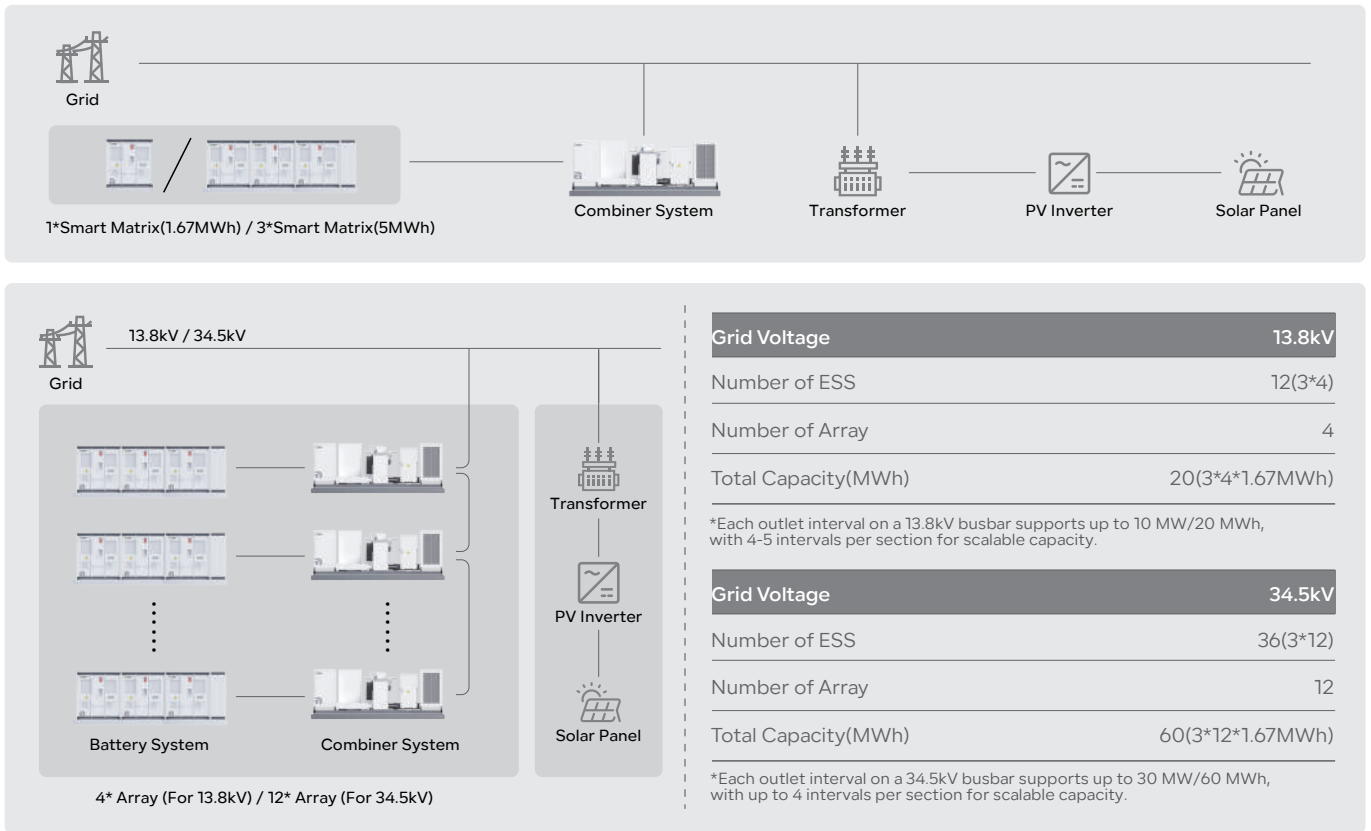

Energy Management System(EMS) Structure

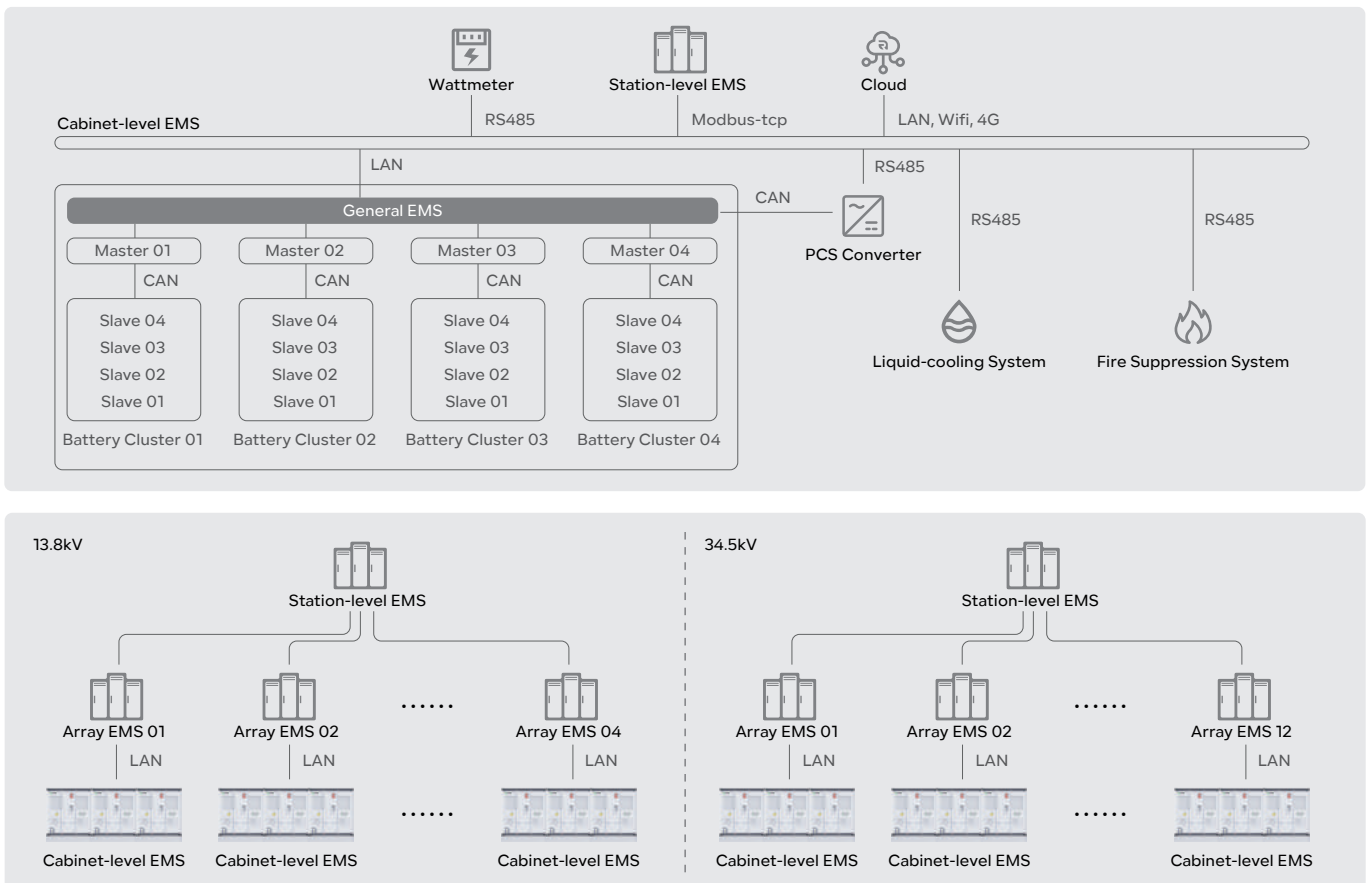

Product Parameter

Battery Energy Storage	1672kWh	3344kWh	5016kWh
Cell Type	LFP 3.2V/314AH		
Module Configuration	1P104S		
String Configuration	1P416S		
Number of Battery System	1	2	3
Number of Strings	4	8	12
Capacity (kWh)	1672	3344	5016
Nominal Voltage (V)	1331.2		
Operation Voltage Range (Vdc)	1218.88~1476.8		
Discharge Depth	90% DoD		
Thermal Management Mode	Liquid-cooling		
Thermal Control Management	Aerosol Extinguishing or PFH		
AC Output			
Rated AC Output Power (kVA)	840	1670	2500
Max. AC Output Power (kVA)	860	1725	2580
Output Voltage Range (Vac)	11kV~33kV		
Rated Grid Frequency (Hz)	50 / 60		
AC PF	0.99 / -1~1		
THDi	≤3%		
System Characteristic			
Communication Interface	CAN, RS485, Ethernet		
Warranty	3 years free, paid from the 4th to the 15th year		
Certifications	IEC62619, IEC62477, EN61000-6-2/4, UL9540A, UL9540, UN3536		
General Parameters			
Product Model	R-SM1672LCB01	R-SM3344LCB01	R-SM5016LCB01
Dimensions - D*H (mm/in)	2991*2591/117.8*102	2991*2591/117.8*102	2991*2591/117.8*102
Dimensions - W (mm/in)	2438/96	4952/195	7466/294
Total Weight (kg/lb)	~15000/~33069	~30000/~66139	~45000/~99208
Combiner System Dimensions- W*D*H (mm/in)	6058*2438*2896/238.5*96*114		
Combiner System Total Weight (kg/lb)	~25000/~55116		
Operation Altitude	3000m / 10000ft(>3000m/10000ft derating)		
Nosie Level@1m	<75dB		
IP Rating	IP54		
Operation Temperature (°C/°F)	-20~55/-4~131 (De-rating over 45°C/113°F)		
Operation Humidity (RH)	≤95%, No condensation		
Storage Conditons	-20°C to 30°C, Up to 95% RH, non-condensing, State of Energy (SoE): 50% initial		

XGen

Vehicle-mounted Mobile Power Supply

XGen is a highly adaptable and energy-efficient power solution, offering multiple output options (120V, 208V, 240V, 480V) to ensure high performance, flexible operation modes, and broad compatibility across diverse applications.



Product Function



Power Generation & Storage for Max. Efficiency

No need for high-power generators—XGen intelligently balances PCS power and generation to reduce fuel consumption.



Versatile Compatibility for All Power Needs

Multiple voltage outputs (480V, 208V, 240V, 120V) for residential, commercial, and industrial use.



Flexible Power Modes for Any Scenario

With a large 560kWh capacity, it supports hybrid, off-grid, AC/DC coupling, and more, adapting seamlessly to diverse energy needs.



High-Power Output, Handles Heavy Loads with Ease

Delivers up to 324kW instant output, ensuring stable power supply for demanding applications.



Smart Management with Remote Control

Built-in EMS system enables real-time monitoring and remote control via Web & App for effortless operation.



All-in-One Charging Solution

Supports Combo fast charging, Type-C & Type-A ports, powering EVs, storage systems, and digital devices.

Product Features

Multi-Source Energy Input

Powered by a 560kWh LiFePO4 battery, supporting grid, diesel generators, and 120kW solar DC charging for seamless energy integration.

Optimized Generator Usage

Pairs with 400kVA generators, reducing upfront investment, fuel consumption, and maintenance costs for smarter power solutions.

Portable Durability

Towable for rapid deployment, with IP54/NEMA 3R protection ensuring durability in harsh environments.

Smart Operation and Maintenance

Comes with a complete EMS that is easy to upgrade, featuring big data management checks, proactive handling, and intelligent SOC calibration to ensure optimal performance with zero downtime.

Application Scenario



MINING




ROAD REPAIR & MAINTENANCE




EARTHQUAKE RELIEF

System Layout

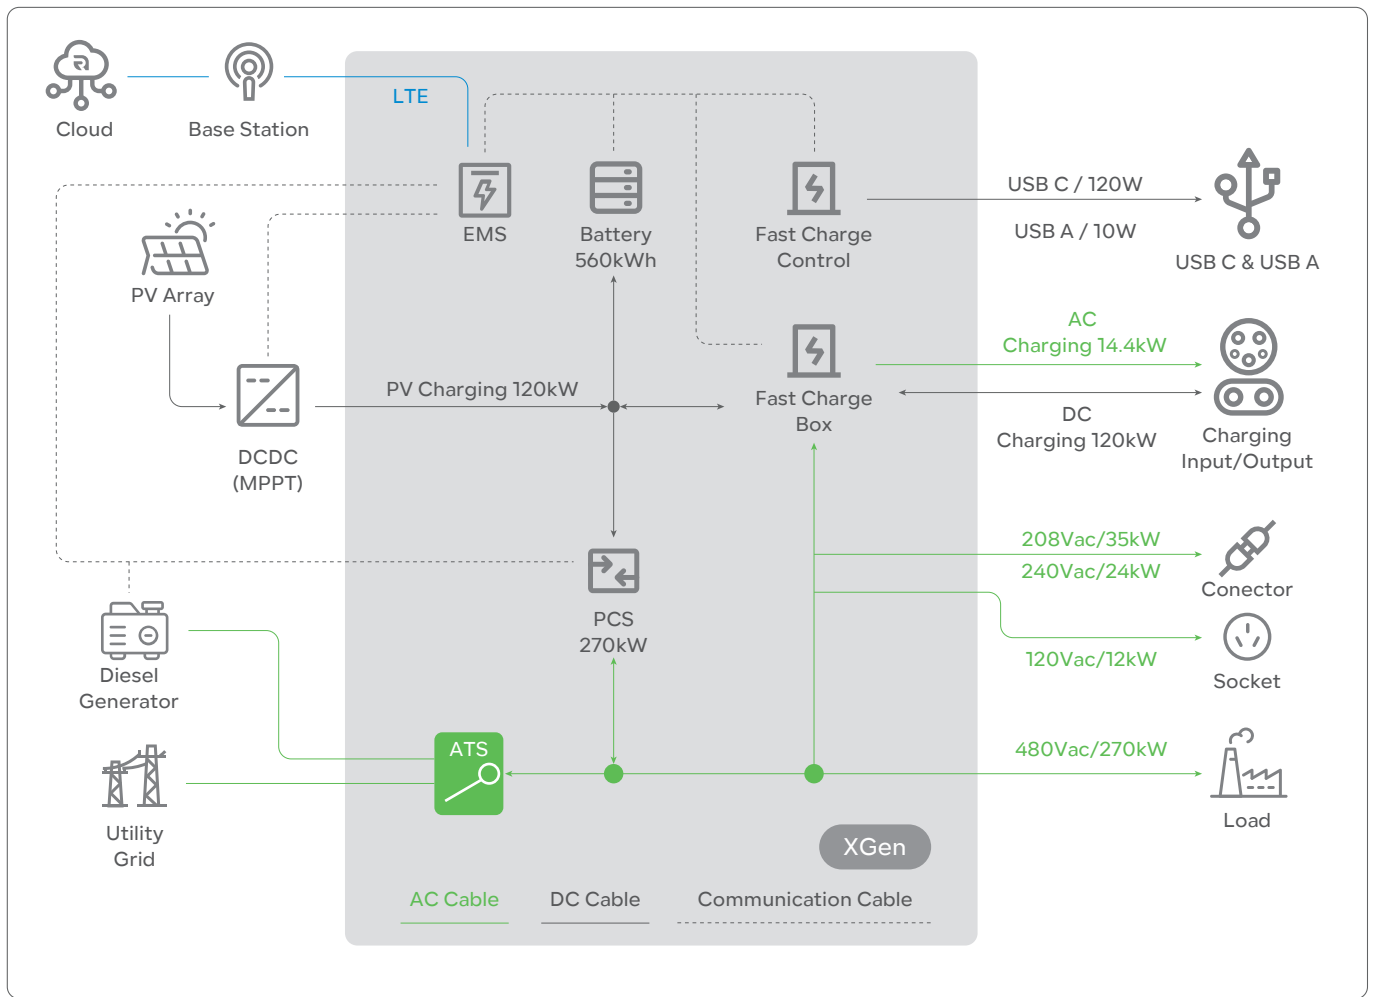


System Interface

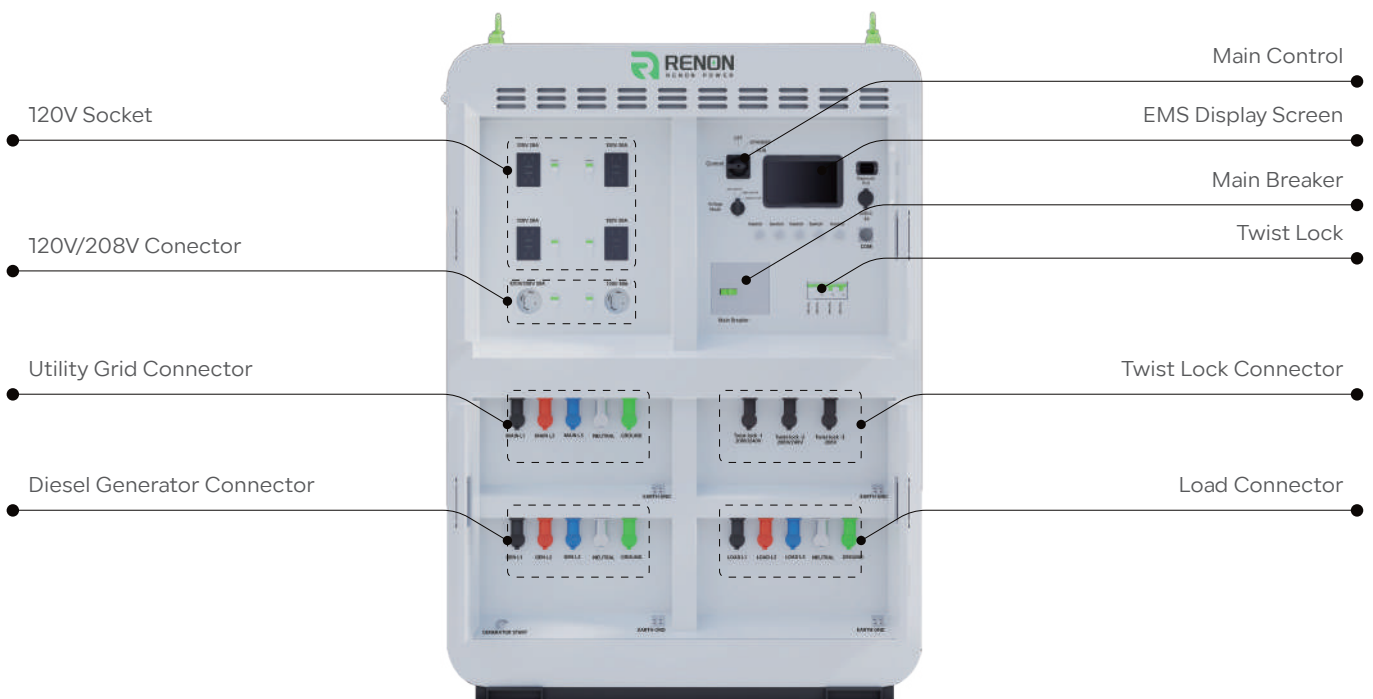


■ Choosing the right generator solution

Assumed Load for System Design: Peak Power: **600** kW, Rated Power: **260** kW

If a Diesel Generator is used as the power source:




- An initial overpurchase of a high-power DG is required to accommodate the maximum starting current of the motors.
- High fuel consumption is inevitable due to frequent motor startups and prolonged operation at low power.
- Conventional diesel generators do not support capacity expansion.
- High maintenance costs caused by frequent motor starts and significant inrush current.



- Not suitable because of the load's high inrush current.




NORMAL PROPOSAL



- There's no need to purchase a high-capacity DG thanks to the shared power output from the XGen.



&



XGen PROPOSAL

- Reduced upfront investment for a low-power DG.
- Reduced fuel consumption.
- Enable simultaneous operation of multiple DGs.
- Reduce maintenance expenses.



Product Parameter

Battery Energy Storage	
Cell Chemistry	LiFePO4
Nominal Energy (kWh)	560
Voltage Range (Vdc)	750~908.8
Nominal Charging Current (A)	330
Nominal Discharging Current (A)	330
Max. Discharging Current (A)	400
DOD	90%

Mobile Charging	
USB C *1(W)	120
USB A *1(W)	10

PV Input	
Input Power (kW)	120
Input Voltage Ranger (Vdc)	750~908.8

AC Output(400Vac On-Grid)	
Rated Power (kVA)	270
Rated Voltage (Vac)	400
Rated Voltage Range (Vac)	340~460
Rated Frequency (Hz)	50 (-5~5)
AC Connection	3P4W
THDi	≤ 3%
Voltage Ripple Coefficient	≤ 1%
Power Factor	0.99/-1~1

AC Output(400Vac Off-Grid)	
Rated Power(kVA)	270
Max. Power(kVA)	324
Rated Voltage(Vac)	400
Rated Voltage Range (Vac)	340~460
Rated Frequency(Hz)	50 (-5~5)
AC Connection	3P4W
Power Factor	0.99/-1~1

AC Output(230Vac Output)	
Rated Power(kVA)	90
Rated Voltage(Vac)	230
AC Connection	1P2W

EV Charging & Charging ESS(AC Charging)	
Interface Type	Combo (IEC62196-1/3)
Current Rating (A)	63
Rated Power (kW)	14.4
Input/Ouput Voltage (Vac)	230
Input/Ouput Voltage Range (Vac)	207~253
Input Frequency (Hz)	50
AC Connection	1P2W

EV Charging & Charging ESS(DC Charging)	
Interface Type	Combo (SAEJ1772)
Rated Power(kW)	120
Output Voltage(to EV)(Vdc)	150~1000
Input Voltage(to ESS)(Vdc)	750~908.8

Compatible Diesel Generator	
Rated Power(kVA)	≤400
Rated Voltage(Vac)	400
Rated Frequency(Hz)	50

General Parameters	
Product Model	R-XG560270H1-EU03
Parallel Capable	Yes (Up to 6)
Ingress Rating	IP54/NEMA 3R
Working Temperature(°C/°F)	-20~55/-4~131
Storage Temperature(°C/°F)	-40~65/-40~149
Relative Humidity (RH)	5~ 95%, non-condensation
System Noise (dB)	<65
Cooling	Air-cooling
Fire Suppression System	Included
Altitude	5000m/16404ft (>3000m/10000 derating)
Certifications	IEC 62619, EN 62109-1, EN 62109-2 EN 61851-1, EN 61851-23, EN 61851-24 EN 62477-1, EN 62909-1, EN 62909-2
Dimensions - W*D*H (mm/in)	1752*4140*2000/69*163*79
Weight (kg/lb)	~5500/~12,125.4

ProControl Base

Cabinet Level Local ESMU

High-end integrated display and control system for commercial and industrial energy storage solutions.



Features



High-Performance Data Processing MCU

Equipped with a powerful processor and ample memory, ensuring fast response to demand-side instructions and efficient data processing.



Advanced Graphics and AI Capabilities

Featuring advanced graphics processing and AI capabilities, offering robust performance for enhanced device intelligence.



High-Brightness Full-View Touch Display

1280*800 resolution, 45cd/m² brightness, full viewing angle, and three-point capacitive touch screen, allowing easy viewing of system data and settings both indoors and outdoors.



Independent Smart Local Control

Built-in modes such as self-use, peak shaving, PV priority, grid priority, backup, and battery modes provide convenient local operation. Supports local intelligent monitoring, data curve generation, parameter settings, firmware updates, maintenance report generation, and log recording for simplified after-sales service.



Flexible Cloud Connectivity

Supports multiple interfaces including LAN, WiFi, and LTE for versatile cloud platform connections based on customer needs.



Comprehensive Communication & Control Interfaces

Includes CAN, RS485, RS232, Type-C, USB3.0, LAN, TF card slot, Nano SIM, HDMI, and RTC interfaces, enabling connection to various external devices and sensors for centralized management and control.

Interface Showcase



Parameters

General Parameters

CPU	RK3568 4xA53@2.0GHz
Memory	RAM: 4GB, EMMC: 64GB, EEPROM:64KB, SSD: 1T(Optional)
GPU	Mali-G52
NPU	Support 1 Tops computing power
OS	Ubuntu 20.04
Brightness	450cd/m ²
Resolution	1280*800
Angle	Full viewing Angle
Touch	3 point capacitive screen
Communication Interface	3* CAN, 6* RS485, 1*RS232, 1*Type-C, 1* USB3.0, 4* 1000Mbps, Lan, 1* TF card, 1* Nano SIM card, 1* HDMI, 1* RTC
Control Interface	12* DO, 16* DI, 2* NTC, 1* Buzzer
Wireless Communication	Wifi/BT, 4G, GPS
Ip Rating	IP65
Operating Temperature	-20°C~70°C

ProControl Prime

Station Level Local EMS

Reliable control and display solution for large distributed energy storage systems.



Features



Information Summarization and Monitoring

EMS collects and uploads operational data of distributed energy storage systems for centralized monitoring. It displays system trends, performance metrics, and fault history to help users optimize operations.



Strategy Algorithm Configuration

EMS offers flexible strategy algorithms for customizing energy storage system operations based on specific needs and system conditions. This allows for optimal energy dispatch and management to maximize efficiency and cost-effectiveness.



Alarm Generation and Handling

EMS provides a user-friendly tool for creating graphical interfaces of energy storage systems. It allows real-time monitoring and management through topology, status diagrams, and device controls.



Energy Metering and Anti-Reverse Flow Control

EMS handles energy metering and anti-reverse flow control, effectively managing energy flow within the storage system and ensuring stable PCS operation.



BMS Data Collection and Display




EMS communicates with Battery Management Systems (BMS) to collect real-time data on battery parameters and displays it graphically. This includes battery health, charge/discharge status, SOC, and SOH.



Profit Analysis

EMS includes robust profit analysis capabilities for in-depth assessment of energy storage system operational data. This analysis helps users evaluate economic benefits, providing strong support for decision-making.

Interface Showcase



Parameters

General Parameters


CPU	2U Rack Server
Memory	Intel® Xeon® Gold 5218 Processor 22M Cache, 2.30 GHz, Qty 2
Hard disk capacity	64G
NIC	3*1.2T SAS
PCIE	4 Gigabit LAN cards6 PCIe 3.0
Power Supply	slots 550W power supply*2
Chassis Size (mm)	Chassis Specifications: 445*87*746mm
IP Rating	IP20
Operating Temperature	5.0°C~40.0°C (41.0°F~104.0°F)
Operating Humidity (RH)	85%, non-condensation

Renon Smart

Cloud Energy Management System

We're Using Smart Power to Simplify Your Life.

Renon Smart is a comprehensive device management and monitoring solution for national agents, secondary agents, installers and users. Comprehensive system for managing large-scale power station and commercial and industrial energy storage systems

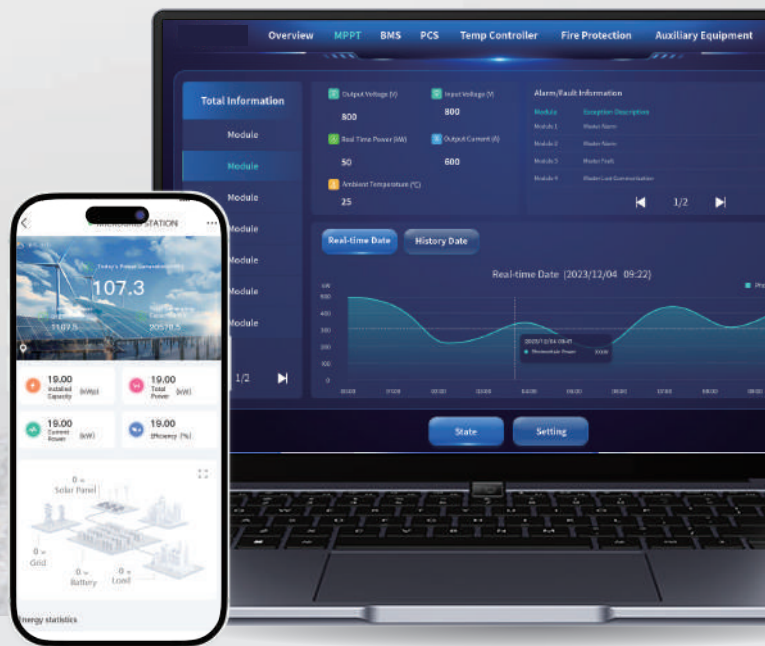

Features



Instant Clarity with Remote Data Monitoring and Analysis

Remote data monitoring, automatic curve generation, and big data analysis management make the product operation status clear at a glance.



Enhanced Security with Distributed Architecture and Data Encryption

Distributed architecture deployment and data security encryption ensure that cloud data is more secure and reliable.



Seamless Connections with Intelligent Mall and Trial Applications

Intelligent mall application and new product trial application enable users to contact source manufacturers directly, making product promotion faster and more accurate.



Boost Customer Satisfaction with Remote Firmware Upgrades


Remote firmware upgrading and intelligent operation and maintenance report generation effectively improve customer satisfaction.




Optimized Channel Construction with a Six-Level Distribution System

The six-level distribution system, from the brand owner to end-users, is more conducive to robust product channel construction.


Interface Showcase

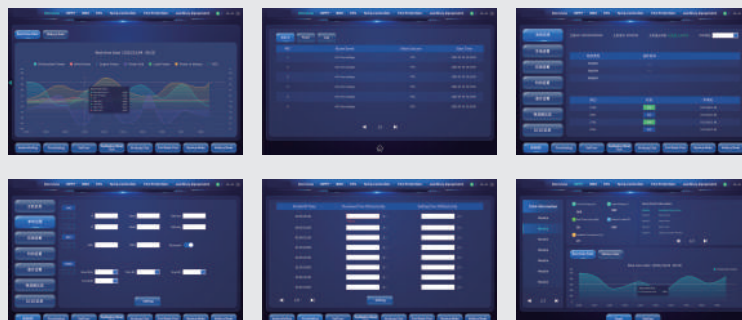

Physical Link

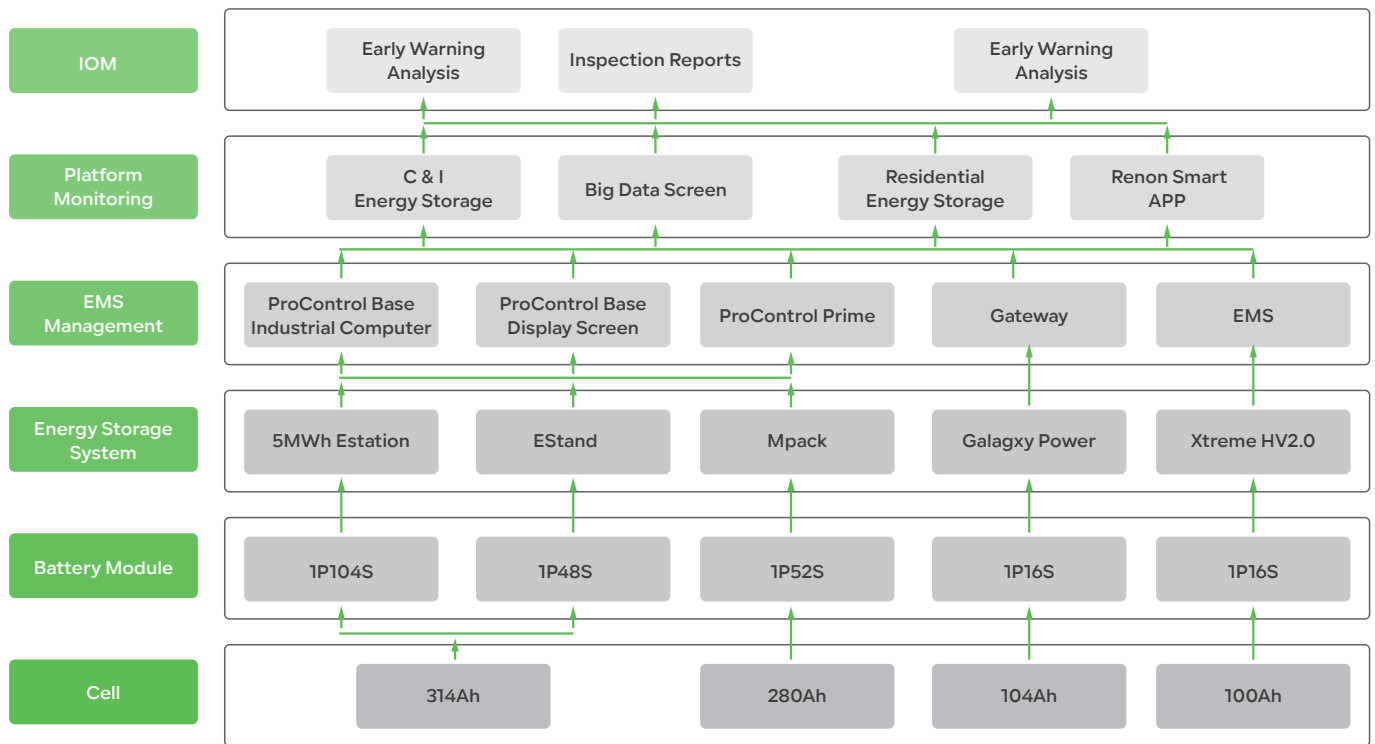

Platform Architecture

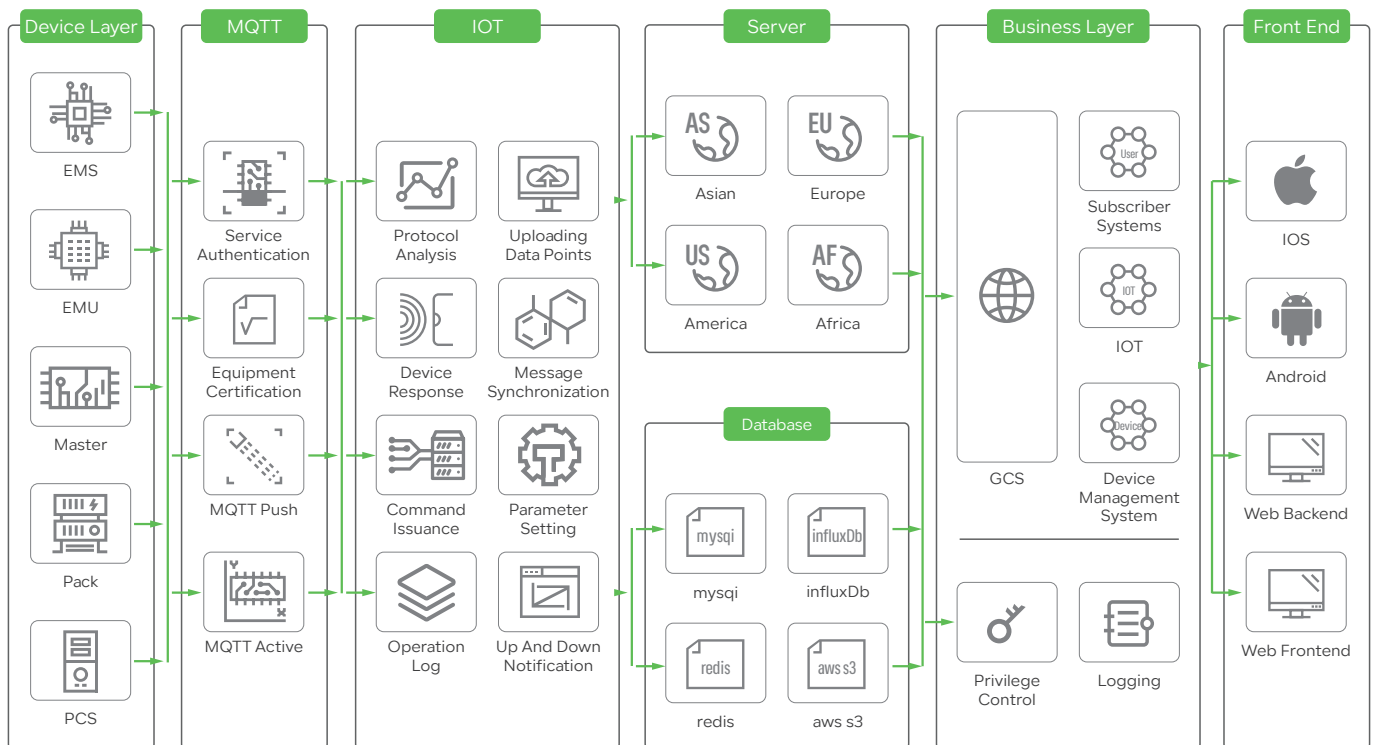

Installation Cases

Renon Power's global installations of microgrid systems enhance energy efficiency and sustainability, providing reliable power solutions for diverse commercial and industrial applications.



Renon EStation 430A

Tokyo, Japan



Renon DC ECube 157kWh*2

Kitsuki City, Japan



Renon DC ECube 38kWh

Chiba Prefecture, Japan



Renon DC ECube 157kWh

Fukushima, Japan



Renon DC ECube 157kWh

Kagoshima, Japan



Renon DC ECube 15kWh*4

Saitama, Japan



Renon DC ECube 215kWh*5

Utsunomiya, Japan



Renon DC ECube 38kWh*4

Gunma prefecture, Japan


Renon Exhibition

At Renon Power, our team is our greatest asset.

We are a diverse group of passionate professionals, united by a shared mission to make green power within reach.


RIMINI Expo

Italy

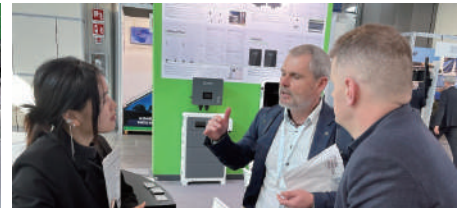

Intersolar 2025 San Diego

The United States

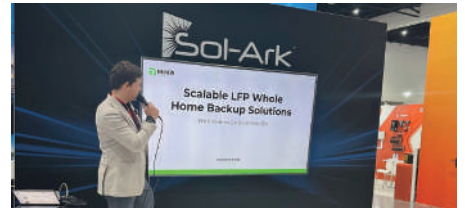


PV EXPO 2025 Tokyo

Japan




RE+ 2024

The United States

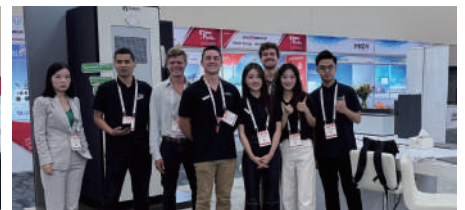

The Smarter E 2024

Germany

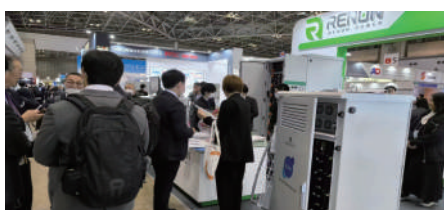

Note Book

PROVIDE
INNOVATIVE,
RELIABLE, AND
AFFORDABLE
ENERGY
STORAGE
SOLUTIONS TO
CUSTOMERS
WORLDWIDE.



PROVIDE
INNOVATIVE,
RELIABLE, AND
AFFORDABLE
ENERGY
STORAGE
SOLUTIONS TO
CUSTOMERS
WORLDWIDE.



Renon Power Technology Inc.

5900 Balcones Drive Suite 100, Austin, TX 78731 USA

Renon Power Solutions Sp.z o.o.

ul. ELBLĄSKA 1, 93-459, ŁÓDŹ, POLAND

Renon Power Technology B.V.

Rietbaan 10, 2908 LP Capelle aan den IJssel

Renon Power 株式会社

東京都中央区日本橋箱崎町20-5 VORT箱崎5F

瑞智新能源(惠州)有限公司

广东省惠州市惠阳区三和街道下桥背康易工业园



Whatsapp



Linkedin



Website